

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 195 847 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
10.04.2002 Bulletin 2002/15

(51) Int Cl.7: H01Q 9/04, H01Q 15/00

(21) Application number: 01308496.7

(22) Date of filing: 04.10.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Diaz, Rodolfo E.
Phoenix, Arizona 85048 (US)
• McKinzie, William E.
Fulton, Maryland 20759 (US)

(30) Priority: 04.10.2000 US 678128
01.11.2000 US 704510


(74) Representative:
McLeish, Nicholas Alistair Maxwell et al
Boult Wade Tennant
Verulam Gardens
70 Gray's Inn Road
London WC1X 8BT (GB)

(71) Applicant: E-Tenna Corporation
Laurel, Maryland 20707 (US)

(54) Multi-resonant, high-impedance surfaces containing loaded-loop frequency selective surfaces

(57) An antenna system and an artificial magnetic conductor (300) include a frequency selective surface having a frequency dependent permeability μ_{1z} in a di-

rection normal to the frequency dependent surface, a conductive ground plane (806), and a rodged media (808) disposed between the frequency selective surface and the conductive ground plane.

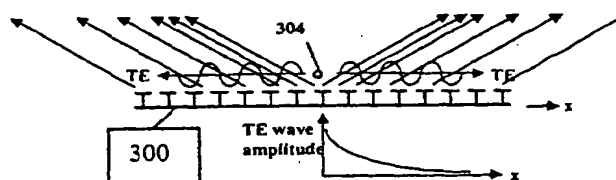

(b)

FIG. 3

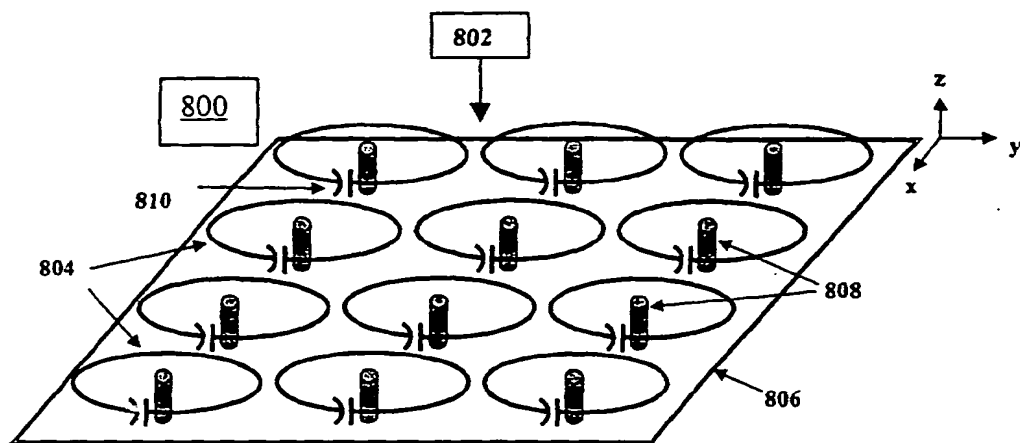


FIG. 8

Description

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation in part of application serial number 09/678, 128 filed October 4, 2000 and commonly assigned with the present application.

BACKGROUND

[0002] The present invention relates generally to high-impedance surfaces. More particularly, the present invention relates to a multi-resonant, high-impedance electromagnetic surface.

[0003] A high impedance surface is a lossless, reactive surface whose equivalent surface impedance, $Z_s = \frac{E_{tan}}{H_{tan}}$, approximates an open circuit and which inhibits the flow of equivalent tangential electric surface current, thereby approximating a zero tangential magnetic field, $H_{tan} \approx 0$. E_{tan} and H_{tan} are the electric and magnetic fields, respectively, tangential to the surface. High impedance surfaces have been used in various antenna applications. These applications range from corrugated horns which are specially designed to offer equal E and H plane half power beamwidths to traveling wave antennas in planar or cylindrical form. However, in these applications, the corrugations or troughs are made of metal where the depth of the corrugations is one quarter of a free space wavelength, $\lambda/4$, where λ is the wavelength at the frequency of interest. At high microwave frequencies, $\lambda/4$ is a small dimension, but at ultra-high frequencies (UHF, 300 MHz to 1 GHz), or even at low microwave frequencies (1-3 GHz), $\lambda/4$ can be quite large. For antenna applications in these frequency ranges, an electrically-thin ($\lambda/100$ to $\lambda/50$ thick) and physically thin high impedance surface is desired.

[0004] One example of a thin high-impedance surface is disclosed in D. Sievenpiper, "High-impedance electromagnetic surfaces." Ph.D. dissertation, UCLA electrical engineering department, filed January 1999, and in PCT Patent Application number PCT/US99/06884. This high impedance surface 100 is shown in FIG. 1. The high-impedance surface 100 includes a lower permittivity spacer layer 104 and a capacitive frequency selective surface (FSS) 102 formed on a metal backplane 106. Metal vias 108 extend through the spacer layer 104, and connect the metal backplane to the metal patches of the FSS layer. The thickness h of the high impedance surface 100 is much less than $\lambda/4$ at resonance, and typically on the order of $\lambda/50$, as indicated in FIG. 1.

[0005] The FSS 102 of the prior art high impedance surface 100 is a periodic array of metal patches 110 which are edge coupled to form an effective sheet capacitance. This is referred to as a capacitive frequency selective surface (FSS). Each metal patch 110 defines a unit cell which extends through the thickness of the high impedance surface 100. Each patch 110 is connected to the metal backplane 106, which forms a ground plane, by means of a metal via 108, which can be plated through holes. The periodic array of metal vias 108 has been known in the prior art as a rodged media, so these vias are sometimes referred to as rods or posts. The spacer layer 104 through which the vias 108 pass is a relatively low permittivity dielectric typical of many printed circuit board substrates. The spacer layer 104 is the region occupied by the vias 108 and the low permittivity dielectric. The spacer layer is typically 10 to 100 times thicker than the FSS layer 102. Also, the dimensions of a unit cell in the prior art high-impedance surface are much smaller than λ at the fundamental resonance. The period is typically between $\lambda/40$ and $\lambda/12$.

[0006] A frequency selective surface is a two-dimensional array of periodically arranged elements which may be etched on, or embedded within, one or multiple layers of dielectric laminates. Such elements may be either conductive dipoles, patches, loops, or even slots. As a thin periodic structure, it is often referred to as a periodic surface.

[0007] Frequency selective surfaces have historically found applications in out-of-band radar cross section reduction for antennas on military airborne and naval platforms. Frequency selective surfaces are also used as dichroic subreflectors in dual-band Cassegrain reflector antenna systems. In this application, the subreflector is transparent at frequency band f_1 and opaque or reflective at frequency band f_2 . This allows one to place the feed horn for band f_1 at the focal point for the main reflector, and another feed horn operating at f_2 at the Cassegrain focal point. One can achieve a significant weight and volume savings over using two conventional reflector antennas, which is critical for space-based platforms.

[0008] The prior art high-impedance surface 100 provides many advantages. The surface is constructed with relatively inexpensive printed circuit technology and can be made much lighter than a corrugated metal waveguide, which is typically machined from a block of aluminum. In printed circuit form, the prior art high-impedance surface can be 10 to 100 times less expensive for the same frequency of operation. Furthermore, the prior art surface offers a high surface impedance for both x and y components of tangential electric field, which is not possible with a corrugated waveguide. Corrugated waveguides offer a high surface impedance for one polarization of electric field only. According to the coordinate convention used herein, a surface lies in the xy plane and the z-axis is normal or perpendicular to the surface. Further, the prior art high-impedance surface provides a substantial advantage in its height reduction over a corrugated metal waveguide, and may be less than one-tenth the thickness of an air-filled corrugated metal waveguide.

[0009] A high-impedance surface is important because it offers a boundary condition which permits wire antennas conducting electric currents to be well matched and to radiate efficiently when the wires are placed in very close proximity to this surface (e.g., less than $\lambda/100$ away). The opposite is true if the same wire antenna is placed very close to a metal or perfect electric conductor (PEC) surface. The wire antenna/PEC surface combination will not radiate efficiently due to a very severe impedance mismatch. The radiation pattern from the antenna on a high-impedance surface is confined to the upper half space, and the performance is unaffected even if the high-impedance surface is placed on top of another metal surface. Accordingly, an electrically-thin, efficient antenna is very appealing for countless wireless devices and skin-embedded antenna applications.

[0010] FIG. 2 illustrates electrical properties of the prior art high-impedance surface. FIG. 2(a) illustrates a plane wave normally incident upon the prior art high-impedance surface 100. Let the reflection coefficient referenced to the surface be denoted by Γ . The physical structure shown in FIG. 2(a) has an equivalent transverse electro-magnetic mode transmission line shown in FIG. 2(b). The capacitive FSS 102 (FIG. 1) is modeled as a shunt capacitance C and the spacer layer 104 is modeled as a transmission line of length h which is terminated in a short circuit corresponding to the backplane 106. Figure 2(c) shows a Smith chart in which the short is transformed into the stub impedance Z_{stub} just below the FSS layer 102. The admittance of this stub line is added to the capacitive susceptance to create a high impedance Z_{in} at the outer surface. Note that the Z_{in} locus on the Smith Chart in FIG. 2(c) will always be found on the unit circle since our model is ideal and lossless. So Γ has an amplitude of unity.

[0011] The reflection coefficient Γ has a phase angle θ which sweeps from 180° at DC, through 0° at the center of the high impedance band, and rotates into negative angles at higher frequencies where it becomes asymptotic to -180° . This is illustrated in FIG. 2(d). Resonance is defined as that frequency corresponding to 0° reflection phase. Herein, the reflection phase bandwidth is defined as that bandwidth between the frequencies corresponding to the $+90^\circ$ and -90° phases. This reflection phase bandwidth also corresponds to the range of frequencies where the magnitude of the surface reactance exceeds the impedance of free space: $|X| \geq \eta_0 = 377 \text{ ohms}$.

[0012] A perfect magnetic conductor (PMC) is a mathematical boundary condition whereby the tangential magnetic field on this boundary is forced to be zero. It is the electromagnetic dual to a perfect electric conductor (PEC) upon which the tangential electric field is defined to be zero. A PMC can be used as a mathematical tool to create simpler but equivalent electromagnetic problems for slot antenna analysis. PMCs do not exist except as mathematical artifacts. However, the prior art high-impedance surface is a good approximation to a PMC over a limited band of frequencies defined by the $\pm 90^\circ$ reflection phase bandwidth. So in recognition of its limited frequency bandwidth, the prior art high-impedance surface is referred to herein as an example of an artificial magnetic conductor, or AMC.

[0013] The prior art high-impedance surface offers reflection phase resonances at a fundamental frequency, plus higher frequencies approximated by the condition where the electrical thickness of the spacer layer, βh , in the high-impedance surface 100 is $n\pi$, where n is an integer. These higher frequency resonances are harmonically related and hence uncontrollable. If the prior art AMC is to be used in a dual-band antenna application where the center frequencies are separated by a frequency range of, say 1.5:1, we would be forced to make a very thick AMC. Assuming a non-magnetic spacer layer ($\mu_D = 1$), the thickness h must be $h = \lambda/14$ to achieve at least a 50% fractional frequency bandwidth where both center frequencies would be contained in the reflection phase bandwidth. Alternatively, magnetic materials could be used to load the spacer layer, but this is a topic of ongoing research and nontrivial expense. Accordingly, there is a need for a class of AMCs which exhibit multiple reflection phase resonances, or multi-band performance, that are not harmonically related, but at frequencies which may be prescribed.

BRIEF SUMMARY

[0014] By way of introduction only, in a first aspect, an artificial magnetic conductor includes a frequency selective surface having a frequency dependent permeability μ_{yz} in a direction normal to the frequency dependent surface, a conductive ground plane, and a rodged medium disposed between the frequency selective surface and the conductive ground plane.

[0015] In another aspect, an artificial magnetic conductor includes a conductive ground plane and a spacer layer disposed on the ground plane. One or more arrays of coplanar loops are resonant at two or more frequency bands, each loop having a similar shape and similar size. The one or more arrays of coplanar loops produce a frequency dependent normal permeability μ_z .

[0016] In another aspect, a disclosed electrical apparatus includes a conductive ground plane and a dielectric layer perforated by conductive rods in electrical contact with the conductive ground plane. The electrical apparatus further includes a frequency selective surface (FSS) disposed on the dielectric layer. The FSS includes a first layer of capacitively coupled loops resonant at a first frequency, a dielectric spacer layer and a second layer of capacitively coupled loops resonant at a second frequency. The frequency selective surface has a frequency dependent permeability in a direction substantially normal to the frequency selectively surface.

[0017] The foregoing summary has been provided only by way of introduction. Nothing in this section should be

taken as a limitation on the following claims, which define the scope of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

5 [0018]

FIG. 1 is a perspective view of a prior art high impedance surface;
 FIG. 2 illustrates a reflection phase model for the prior art high impedance surface;
 FIG. 3 is a diagram illustrating surface wave properties of an artificial magnetic conductor;
 10 FIG. 4 illustrates electromagnetic fields of a TE mode surface wave propagating in the x direction in the artificial magnetic conductor of FIG. 3;
 FIG. 5 illustrates electromagnetic fields of a TM mode surface wave propagating in the x direction in the artificial magnetic conductor of FIG. 3;
 FIG. 6 illustrates top and cross sectional views of a prior art high impedance surface;
 15 FIG. 7 presents a new effective media model for the prior art high-impedance surface of FIG. 6;
 FIG. 8 illustrates a first embodiment of an artificial magnetic conductor;
 FIG. 9 illustrates a second, multiple layer embodiment of an artificial magnetic conductor;
 FIG. 10 is a cross sectional view of the artificial magnetic conductor of FIG. 9;
 FIG. 11 illustrates a first physical embodiment of a loop for an artificial magnetic molecule;
 20 FIG. 12 illustrates a multiple layer artificial magnetic conductor using the loop of FIG. 11(d);
 FIG. 13 shows y-polarized electromagnetic simulation results for the normal-incidence reflection phase of the artificial magnetic conductor illustrated in FIG. 12;
 FIG. 14 shows y-polarized electromagnetic simulation results for the normal-incidence reflection phase of the artificial magnetic conductor very similar to that illustrated in FIG. 12, except the gaps in the loops are now shorted
 25 together;
 FIG. 15 shows the TEM mode equivalent circuits for the top layer, or FSS layer, of a two layer artificial magnetic conductor of FIG. 8;
 FIG. 16 illustrates the effective relative permittivity for a specific case of a multi-resonant FSS, and the corresponding reflection phase; for an AMC which uses this FSS as its upper layer.
 30 FIG. 17 shows an alternative embodiment for a frequency selective surface implemented with square loops;
 FIG. 18 shows measured reflection phase data for an x polarized electric field normally incident on the AMC of FIG. 17;
 FIG. 19 shows measured reflection phase data for ay polarized electrical field normally incident on the AMC of FIG. 17;
 35 FIG. 20 shows additional alternative embodiments for a frequency selective surface implemented with square loops;
 FIG. 21 shows additional alternative embodiments for a frequency selective surface implemented with square loops;
 FIG. 22 shows measured reflection phase data for an x polarized electric field normally incident on the AMC of FIG. 21;
 40 FIG. 23 shows measured reflection phase data for a y polarized electrical field normally incident on the AMC of FIG. 21;
 FIG. 24 illustrates another embodiment of a capacitive frequency selective surface structure consisting of a layer of loops closely spaced to a layer of patches;
 45 FIG. 25 illustrates an alternative embodiment of a capacitive frequency selective surface structure using hexagonal loops;
 FIG. 26 illustrates an alternative embodiment of a capacitive frequency selective surface structure using hexagonal loops;
 FIG. 27 illustrates an alternative embodiment of a capacitive frequency selective surface structure using hexagonal loops;
 50 FIG. 28 illustrates an effective media model for an artificial magnetic conductor;
 FIG. 29 illustrates a prior art high impedance surface;
 FIG. 30 illustrates Lorentz and Debye frequency responses for the capacitance of an FSS used in a multi-resonant AMC;
 55 FIG. 31 illustrates an artificial magnetic conductor including a multiple layer frequency selective surface; and
 FIG. 32 illustrates a top view of the multiple-layer frequency selective surface of FIG. 31.

DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EMBODIMENTS

[0019] A planar, electrically-thin, anisotropic material is designed to be a high-impedance surface to electromagnetic waves. It is a two-layer, periodic, magnetodielectric structure where each layer is engineered to have a specific tensor permittivity and permeability behavior with frequency. This structure has the properties of an artificial magnetic conductor over a limited frequency band or bands, whereby, near its resonant frequency, the reflection amplitude is near unity and the reflection phase at the surface lies between ± 90 degrees. This engineered material also offers suppression of transverse electric (TE) and transverse magnetic (TM) mode surface waves over a band of frequencies near where it operates as a high impedance surface. The high impedance surface provides substantial improvements and advantages. Advantages include a description of how to optimize the material's effective media constituent parameters to offer multiple bands of high surface impedance. Advantages further include the introduction of various embodiments of conducting loop structures into the engineered material to exhibit multiple reflection-phase resonant frequencies. Advantages still further include a creation of a high-impedance surface exhibiting multiple reflection-phase resonant frequencies without resorting to additional magnetodielectric layers.

[0020] This high-impedance surface has numerous antenna applications where surface wave suppression is desired, and where physically thin, readily attachable antennas are desired. This includes internal antennas in radiotelephones and in precision GPS antennas where mitigation of multipath signals near the horizon is desired.

[0021] An artificial magnetic conductor (AMC) offers a band of high surface impedance to plane waves, and a surface wave bandgap over which bound, guided transverse electric (TE) and transverse magnetic (TM) modes cannot propagate. TE and TM modes are surface waves moving transverse or across the surface of the AMC, in parallel with the plane of the AMC. The dominant TM mode is cut off and the dominant TE mode is leaky in this bandgap. The bandgap is a band of frequencies over which the TE and TM modes will not propagate as bound modes.

[0022] FIG. 3 illustrates surface wave properties of an AMC 300 in proximity to an antenna or radiator 304. FIG. 3 (a) is an ω - β diagram for the lowest order TM and TE surface wave modes which propagate on the AMC 300. Knowledge of the bandgap over which bound TE and TM waves cannot propagate is very critical for antenna applications of an AMC because it is the radiation from the unbound or leaky TE mode, excited by the wire antenna 304 and the inability to couple into the TM mode that makes bent-wire monopoles, such as the antenna 304 on the AMC 300, a practical antenna element. The leaky TE mode occurs at frequencies only within the bandgap.

[0023] FIG. 3(b) is a cross sectional view of the AMC 300 showing TE waves radiating from the AMC 300 as leaky waves. Leakage is illustrated by the exponentially increasing spacing between the arrows illustrating radiation from the surface as the waves radiate power away from the AMC 300 near the antenna 304. Leakage of the surface wave dramatically reduces the diffracted energy from the edges of the AMC surface in antenna applications. The radiation pattern from small AMC ground planes can therefore be substantially confined to one hemisphere, the hemisphere above the front or top surface of the AMC 300. The front or top surface is the surface proximate the antenna 304. The hemisphere below or behind the AMC 300, below the rear or bottom surface of the AMC 300, is essentially shielded from radiation. The rear or bottom surface of the AMC 300 is the surface away from the antenna 304.

[0024] FIG. 4 illustrates a TE surface wave mode on the artificial magnetic conductor 300 of FIG. 3. Similarly, FIG. 5 illustrates a TM surface wave mode on the AMC 300 of FIG. 3. The coordinate axes in FIGS. 4 and 5, and as used herein, place the surface of the AMC 300 in the xy plane. The z axis is normal to the surface. The TE mode of FIG. 4 propagates in the x direction along with loops of an associated magnetic field H. The amplitude of the x component of magnetic field H both above the surface and within the surface is shown by the graph in FIG. 4. FIG. 5 shows the TM mode propagating in the x direction, along with loops of an associated electric field E. The relative amplitude of the x component of the electric field E is shown in the graph in FIG. 5.

[0025] The performance and operation of the AMC 300 will be described in terms of an effective media model. An effective media model allows transformation all of the fine, detailed, physical structure of an AMC's unit cell into that of equivalent media defined only by the permittivity and permeability parameters. These parameters allow use of analytic methods to parametrically study wave propagation on AMCs. Such analytic models lead to physical insights as to how and why AMCs work, and insights on how to improve them. They allow one to study an AMC in general terms, and then consider each physical embodiment as a specific case of this general model. However, it is to be noted that such models represent only approximations of device and material performance and are not necessarily precise calculations of that performance.

[0026] First, the effective media model for the prior art high-impedance surface is presented. Consider a prior art high-impedance surface 100 comprised of a square lattice of square patches 110 as illustrated in FIG. 6. Each patch 110 has a metal via 108 connecting it to the backplane 106. The via 108 passes through a spacer layer 102, whose isotropic host media parameters are ϵ_D and μ_D .

[0027] FIG. 7 presents a new effective media model for substantially characterizing the prior art high-impedance surface of FIG. 6. Elements of the permittivity tensor are given in FIG. 7. The parameter α is a ratio of areas, specifically the area of the cross section of the via 108, $\pi d^2/4$, to the area of a unit cell, $a^2 = A$. Each unit cell has an area A and

includes one patch 110, measuring $b \times b$ in size, plus the space g in the x and y directions to an adjacent patch 110, for a pitch or period of a , and with a thickness equal to the thickness of the high impedance surface 100, or $h + \delta$ in FIG. 6. Note that α is typically a small number much less than unity, and usually below 1%.

[0028] In the cross sectional view of FIG. 6(b), the high impedance surface 100 includes a first or upper region 602 and a second or lower region 604. The lower region 604, denoted here as region 2, is referred to as a rodged media. Transverse electric and magnetic fields in this region 604 are only minimally influenced by the presence of the vias or rods 108. The effective transverse permittivity, ϵ_{2x} and permeability, μ_{2x} , are calculated as minor perturbations from the media parameters of the host dielectric. This is because the electric polarisability of a circular cylinder, $\pi a^2/2$, is quite small for the thin metal rods whose diameter is small relative to the period a . Also note that effective transverse permittivity, ϵ_{2x} , and permeability, μ_{2x} , are constant with frequency. However, the normal, or z -directed, permittivity is highly dispersive or frequency dependent. A transverse electromagnetic (TEM) wave with a z -directed electric field traveling in a lateral direction (x or y), in an infinite rodged medium, will see the rodged media 102 as a high pass filter. The TEM wave will experience a cutoff frequency, f_c , below which ϵ_{2z} is negative, and above this cutoff frequency, ϵ_{2z} is positive and asymptotically approaches the host permittivity ϵ_D . This cutoff frequency is essentially given by

$$f_c = \frac{1}{2\pi \sqrt{\epsilon_D \epsilon_0 \mu_D \mu_0} \frac{A}{4\pi} \left[\ln\left(\frac{1}{\alpha}\right) + \alpha - 1 \right]}$$

The reflection phase resonant frequency of the prior art high-impedance surface 100 is found well below the cutoff frequency of the rodged media 102, where ϵ_{2z} is quite negative.

[0029] The upper region 602, denoted as region 1, is a capacitive FSS. The transverse permittivity, ϵ_{1x} or ϵ_{1y} , is increased by the presence of the edge coupled metal patches 110 so that $\epsilon_{1x} = \epsilon_{1y} \gg 1$, typically between 10 and 100 for a single layer frequency selective surface such as the high-impedance surface 100. The effective sheet capacitance, $C = \epsilon_0 \epsilon_{1x} t$, is uniquely defined by the geometry of each patch 110, but ϵ_{1x} in the effective media model is somewhat arbitrary since t is chosen arbitrarily. The variable t is not necessarily the thickness of the patches, which is denoted as δ . However, t should be much less than the spacer layer 604 height h .

[0030] The tensor elements for the upper layer 602 of the prior art high-impedance surface 100 are constant values which do not change with frequency. That is, they are non-dispersive. Furthermore, for the upper layer 602, the z component of the permeability is inversely related to the transverse permittivity by $\mu_{1z} = 2/\epsilon_{1x}$. Once the sheet capacitance is defined, μ_{1z} is fixed.

[0031] It is useful to introduce the concept of an artificial magnetic molecule. An artificial magnetic molecule (AMM) is an electrically small conductive loop which typically lies in one plane. Both the loop circumference and the loop diameter are much less than one free-space wavelength at the useful frequency of operation. The loops can be circular, square, hexagonal, or any polygonal shape, as only the loop area will affect the magnetic dipole moment. Typically, the loops are loaded with series capacitors to force them to resonate at frequencies well below their natural resonant frequency

[0032] A three dimensional, regular array or lattice of AMMs is an artificial material whose permeability can exhibit a Lorentz resonance, assuming no intentional losses are added. At a Lorentz resonant frequency, the permeability of the artificial material approaches infinity. Depending on where the loop resonance is engineered, the array of molecules can behave as a bulk paramagnetic material ($\mu_r > 1$) or as a diamagnetic material ($\mu_r < 1$) in the direction normal to the loops. AMMs may be used to depress the normal permeability of the FSS layer, region 1, in AMCs. This in turn has a direct impact on the TE mode cutoff frequencies, and hence the surface wave bandgaps.

[0033] The prior art high impedance surface has a fundamental, or lowest, resonant frequency near $f_0 = 1/(2\pi \sqrt{\mu_D \mu_0 h C})$, where the spacer layer is electrically thin, ($\beta h \ll 1$ where $\beta = \sqrt{\mu_D \mu_0 \epsilon_D \epsilon_0}$). Higher order resonances are also found, but at much higher frequencies where $\beta h \approx n\pi$ and $n=1,2,3,\dots$. The $n=1$ higher order resonance is typically 5 to 50 times higher than the fundamental resonance. Thus, a prior art high impedance surface designed to operate at low microwave frequencies (1-3 GHz) will typically exhibit its next reflection phase resonance in millimeter wave bands (above 30 GHz).

[0034] There is a need for an AMC which provides a second band or even multiple bands of high surface impedance whose resonant frequencies are all relatively closely spaced, within a ratio of about 2:1 or 3:1. This is needed, for example, for multi-band antenna applications. Furthermore, there is a need for an AMC with sufficient engineering degrees of freedom to allow the second and higher reflection phase resonances to be engineered or designated arbitrarily. Multiple reflection phase resonances are possible if more than two layers (4, 6, 8, etc.) are used in the fabrication of an AMC. However, this adds cost, weight, and thickness relative to the single resonant frequency design. Thus there

is a need for a means of achieving multiple resonances from a more economical two-layer design. In addition, there is a need for a means of assuring the existence of a bandgap for bound, guided, TE and TM mode surface waves for all of the high-impedance bands, and within the $\pm 90^\circ$ reflection phase bandwidths.

[0035] FIG. 8 illustrates an artificial magnetic conductor (AMC) 800. The AMC 800 includes an array 802 that is in one embodiment a coplanar array of resonant loops or artificial magnetic molecules 804 which are strongly capacitively coupled to each other, forming a capacitive frequency selective surface (FSS). The resonant loops 804 in the illustrated embodiment are uniformly spaced and at a height h above a solid conductive ground plane 806. An array of electrically short, conductive posts or vias 808 are attached to the ground plane 806 only and have a length h . Each loop 804 includes a lumped capacitive load 810. The one or more layers of artificial magnetic molecules (AMMs) or resonant loops of the artificial magnetic conductor 800 create a frequency dependent permeability in the z direction, normal to the surface of the AMC 800.

[0036] An AMC 800 with a single layer of artificial magnetic molecules 804 is shown in FIG. 8. In this embodiment, each loop and capacitor load are substantially identical so that all loops have substantially the same resonant frequency. In alternative embodiments, loops having different characteristics may be used. In physical realizations, due to manufacturing tolerances and other causes, individual loops and their associated resonant frequencies will not necessarily be identical.

[0037] An AMC 900 with multiple layers of artificial magnetic molecules 804 is shown in FIG. 9. FIG. 10 is a cross sectional view of the artificial magnetic conductor 900 of FIG. 9. The AMC 900 includes a first layer 902 of loops 804 resonant at a first frequency f_1 . The AMC 900 includes a second layer 904 of loops 804 resonant at a second frequency f_2 . Each loop 804 of the first layer 902 of loops includes a lumped capacitive load C_1 908. Each loop 804 of the second layer 904 of loops includes a lumped capacitive load C_2 906. The lumped capacitances may be the same but need not be. In combination, the first layer 902 of loops 804 and the second layer 906 of loops 904 form a frequency selective surface (FSS) layer 910 disposed on a spacer layer 912. In practical application, the low frequency limit of the transverse effective relative permittivity, ϵ_{1x} and ϵ_{1y} , for the multiple layer AMC 900 lies between 100 and 2000. Accordingly, strong capacitive coupling is present between loops 902 and 904. A practical way to achieve this coupling is to print two layers of loops on opposite sides of an FSS dielectric layer as shown in FIG. 10. Other realizations may be chosen as well.

[0038] FIG. 11 illustrates a first physical embodiment of a loop 1100 for use in an artificial magnetic conductor such as the AMC 800 of FIG. 8. Conducting loops such as loop 1100 which form the artificial magnetic molecules can be implemented in a variety of shapes such as square, rectangular, circular, triangular, hexagonal, etc. In the embodiment of FIG. 11, the loop 1100 is square in shape. Notches 1102 can be designed in the loops to increase the self inductance, which lowers the resonant frequency of the AMMs. Notches 1102 and gaps 1104 can also be introduced to engineer the performance of the loop 1100 to a particular desired response. For example, the bands or resonance frequencies may be chosen by selecting a particular shape for the loop 1100. In general, a gap 1104 cuts all the way through a side of the loop 1100 from the center of the loop 1100 to the periphery. In contrast, a notch cuts through only a portion of a side between the center and periphery of the loop 1100. FIG. 11 illustrates a selection of potential square loop designs.

[0039] FIG. 12 illustrates a portion of a two layer artificial magnetic conductor whose FSS layer uses a square loop of FIG. 11(d). Wide loops with relatively large surface area promote capacitive coupling between loops of adjacent layers when used in a two-layer overlapping AMC, as illustrated in FIG. 12. An overlap region 1202 at the gap 1104 provides the series capacitive coupling required for loop resonance.

[0040] In one preferred embodiment, loops of the type illustrated in FIGS. 11 and 12 are formed on surfaces of dielectric materials using conventional printed circuit board (PCB) manufacturing techniques. For example, a metallic layer is deposited on a surface of the PCB and subsequently patterned by chemical etching or other technique. Such processes provide precise control of sizes, spacing and uniformity of printed features.

[0041] FIG. 13 and FIG. 14 show simulation results for the normal-incidence reflection phase of the AMC illustrated in FIG. 12. In both simulations, the incident electric field is y -polarized. In the simulation illustrated in FIG. 13, $P=10.4\text{mm}$, $h=6\text{mm}$, $t=0.2\text{mm}$, $s=7.2\text{mm}$, $w=1.6\text{mm}$, $g_2=0.4\text{mm}$, $\epsilon_{r1}=\epsilon_{r2}=3.38$. FIG. 13 shows a fundamental resonance near 1.685 GHz, and a second resonance near 2.8 GHz. In FIG. 14, when the gap in the loops is eliminated so that the loops are shorted and $g_2=0$ in FIG. 12, then only one resonance is obtained. The reason that the AMC 800 with gaps 1104 has a second resonance is that the effective transverse permittivity of the frequency selective surface has become frequency dependent. A simple capacitive model is no longer adequate.

[0042] FIG. 15 shows equivalent circuits for portions of the artificial magnetic conductor 800 of FIG. 8. FIG. 15(a) illustrates the second Foster canonical form for the input admittance of a one-port circuit, which is a general analytic model for the effective transverse permittivity of complex frequency selective surface (FSS) structures. FIG. 15(b) gives an example of a specific equivalent circuit model for an FSS whereby two material or intrinsic resonances are assumed. FIG. 15(c) shows the TEM mode equivalent circuit for plane waves normally incident on a two layer AMC, such as AMC 900 of FIG. 9. As noted above, the models developed herein are useful for characterizing, understanding, designing and engineering devices such as the AMCs described and illustrated herein. These models represent approx-

imations of actual device behavior.

[0043] Complex loop FSS structures, such as that shown in FIG. 12, have a dispersive, or frequency dependent, effective transverse permittivity which can be properly modeled using a more complex circuit model. Furthermore, analytic circuit models for dispersive dielectric media can be extended in applicability to model the transverse permittivity of complex FSS structures. The second Foster canonical circuit for one-port networks, shown in FIG. 15(a), is a general case which should cover all electrically-thin FSS structures. Each branch manifests an intrinsic resonance of the FSS. For an FSS made from low loss materials, R_n is expected to be very low, hence resonances are expected to be Lorentzian.

[0044] The effective sheet capacitance for the loop FSS shown in FIG. 12 has a Lorentz resonance somewhere between 1.685 GHz and 2.8 GHz. In fact, if the transverse permittivity of this FSS is modeled using only a three-branch admittance circuit, as shown in FIG. 15(b), the ϵ_{1y} curve 1602 shown in the upper graph of FIG. 16 is obtained. Two FSS material resonances are evident near 2.25 GHz and 3.2 GHz. The ϵ_{1y} curve 1604 is the transverse relative permittivity required to achieve resonance for the AMC, a zero degree reflection phase. This curve 1604 is simply found by equating the capacitive reactance of the FSS, $X_c = 1/(\omega C) = 1/(\omega \epsilon_1 \epsilon_o f)$, to the inductive reactance of the spacer layer, $X_L = \omega L = \omega \mu_2 \mu_o h$, and solving for transverse relative permittivity:

$\epsilon_{1y} = 1/(\omega^2 \mu_2 \mu_o \epsilon_o h f)$. Intersections of the curve 1602 and the curve 1604 define the frequencies for reflection phase resonance. The reflection phase curve shown in the lower graph of FIG. 16 was computed using the transmission line model shown in FIG. 15(c) in which the admittance of the FSS is placed in parallel with the shorted transmission line of length h representing the spacer layer and backplane. This circuit model predicts a dual resonance near 1.2 GHz and 2.75 GHz, which are substantially the frequencies of intersection in the ϵ_{1y} plot. Thus the multiple resonant branches in the analytic circuit model for the FSS transverse permittivity can be used to explain the existence of multiple AMC phase resonances. Any realizable FSS structure can be modeled accurately using a sufficient number of shunt branches.

[0045] There are many additional square loop designs which may be implemented in FSS structures to yield a large transverse effective permittivity. More examples are shown in FIGS. 17, 20 and 21 where loops of substantially identical size and similar shape are printed on opposite sides of a single dielectric layer FSS. Reflection phase results for x and y polarized electric fields applied to an AMC of the design shown in FIG. 17 are shown in FIGS. 18 and 19. In this design, $P=400$ mils, $g_1=30$ mils, $g_2=20$ mils, $r=40$ mils, $w=30$ mils, $t=8$ mils, and $h=60$ mils. $\epsilon_r=3.38$ in both FSS and spacer layers since this printed AMC is fabricated using Rogers R04003 substrate material. In the center of each loop, a via is fabricated using a 20 mil diameter plated through hole.

[0046] FIG. 18 shows measured reflection phase data for an x polarized electric field normally incident on the AMC of FIG. 17. Resonant frequencies are observed near 1.6 GHz and 3.45 GHz. Similarly, FIG. 19 shows measured reflection phase data for a y polarized electric field normally incident on the AMC of FIG. 17. Resonant frequencies are observed near 1.4 GHz and 2.65 GHz.

[0047] In FIGS. 18 and 19, a dual resonant performance is clearly seen in the phase data. For the specific case fabricated, each polarization sees different resonant frequencies. However, it is believed that the design has sufficient degrees of freedom to make the resonance frequencies polarization independent.

[0048] FIG. 21 shows an additional alternative embodiment for a frequency selective surface implemented with square loops. The illustrated loop design of FIG. 21 has overlapping square loops 2100 on each layer 902, 904 with deep notches 2102 cut from the center 2104 toward each corner. Gaps 2106, 2108 are found at the 4:30 position on the upper layer and at the 7:30 position on the lower layer respectively. This design was also fabricated, using $h=60$ mils and $t=8$ mils of Rogers R04003 ($\epsilon_r=3.38$) as the spacer layer and FSS layer thickness respectively. AMC reflection phase for the x and y directed E field polarization is shown in FIGS. 22 and 23 respectively. Again, dual resonant frequencies are clearly seen.

[0049] An alternative type of dispersive capacitive FSS structure can be created where loops 2402 are printed on the one side and notched patches 2404 are printed on the other side of a single dielectric layer FSS. An example is shown in FIG. 24.

[0050] In addition to the square loops illustrated in FIGS. 17, 20, 21 and 24, hexagonal loops can be printed in a variety of shapes that include notches which increase the loop self inductance. These notches may vary in number and position, and they are not necessarily the same size in a given loop. Furthermore, loops printed on opposite sides of a dielectric layer can have different sizes and features. There are a tremendous number of independent variables which uniquely define a multilayer loop FSS structure.

[0051] Six possibilities of hexagonal loop FSS designs are illustrated in FIGS. 25, 26 and 27. In each of FIGS. 25, 26 and 27, a first layer 902 of loops is capacitively coupled with a second layer of loops 904. The hexagonal loops presented here are intended to be regular hexagons. Distorted hexagons could be imagined in this application, but their advantage is unknown at this time.

[0052] FIG. 28 illustrates an effective media model for a high impedance surface 2800. The general effective media model of FIG. 28 is applicable to high impedance surfaces such as the prior art high impedance surface 100 of FIG.

1 and the artificial magnetic conductor (AMC) 800 of FIG. 8. The AMC 800 includes two distinct electrically-thin layers, a frequency selective surface (FSS) 802 and a spacer layer 804. Each layer 802, 804 is a periodic structure with a unit cell repeated periodically in both the x and y directions. The periods of each layer 802, 804 are not necessarily equal or even related by an integer ratio, although they may be in some embodiments. The period of each layer is much smaller than a free space wavelength λ at the frequency of analysis ($\lambda/10$ or smaller). Under these circumstances, effective media models may be substituted for the detailed fine structure within each unit cell. As noted, the effective media model does not necessarily characterize precisely the performance or attributes of a surface such as the AMC 800 of FIG. 8 but merely models the performance for engineering and analysis. Changes may be made to aspects of the effective media model without altering the overall effectiveness of the model or the benefits obtained therefrom.

[0053] As will be described, the high impedance surface 2800 for the AMC 800 of FIG. 8 is characterized by an effective media model which includes an upper layer and a lower layer, each layer having a unique tensor permittivity and tensor permeability. Each layer's tensor permittivity and each layer's tensor permeability have non-zero elements on the main tensor diagonal only, with the x and y tensor directions being in-plane with each respective layer and the z tensor direction being normal to each layer. The result for the AMC 800 is an AMC resonant at multiple resonance frequencies.

[0054] In the two-layer effective media model of FIG. 28, each layer 2802, 2804 is a bi-anisotropic media, meaning both permeability μ and permittivity ϵ are tensors. Further, each layer 2802, 2804 is uniaxial meaning two of the three main diagonal components are equal, and off-diagonal elements are zero, in both μ and ϵ . So each layer 2802, 2804 may be considered a bi-uniaxial media. The subscripts t and n denote the transverse (x and y directions) and normal (z direction) components.

[0055] Each of the two layers 2802, 2804 in the bi-uniaxial effective media model for the high impedance surface 2800 has four material parameters: the transverse and normal permittivity, and the transverse and normal permeability. Given two layers 2802, 2804, there are a total of eight material parameters required to uniquely define this model. However, any given type of electromagnetic wave will see only a limited subset of these eight parameters. For instance, uniform plane waves at normal incidence, which are a transverse electromagnetic (TEM) mode, are affected by only the transverse components of permittivity and permeability. This means that the normal incidence reflection phase plots, which reveal AMC resonance and high-impedance bandwidth, are a function of only ϵ_{1t} , ϵ_{2t} , μ_{1t} , and μ_{2t} (and heights h and t). This is summarized in Table 1 below.

Table 1

Wave Type	Electric Field Sees	Magnetic Field Sees
TEM, normal incidence	$\epsilon_{1t}, \epsilon_{2t}$	μ_{1t}, μ_{2t}
TE to x	$\epsilon_{1t}, \epsilon_{2t}$	$\mu_{1t}, \mu_{2t}, \mu_{1n}, \mu_{2n}$
TM to x	$\epsilon_{1t}, \epsilon_{2t}, \epsilon_{1n}, \epsilon_{2n}$	μ_{1t}, μ_{2t}

[0056] A transverse electric (TE) surface wave propagating on the high impedance surface 2800 has a field structure shown in FIG. 4. By definition, the electric field (E field) is transverse to the direction of wave propagation, the $+x$ direction. It is also parallel to the surface. So the electric field sees only transverse permittivities. However, the magnetic field (H field) lines form loops in the xz plane which encircle the E field lines. So the H field sees both transverse and normal permeabilities.

[0057] The transverse magnetic (TM) surface wave has a field structure shown in FIG. 5. Note that, for TM waves, the role of the E and H fields is reversed relative to the TE surface waves. For TM modes, the H field is transverse to the direction of propagation, and the E field lines (in the xz plane) encircle the H field. So the TM mode electric field sees both transverse and normal permittivities.

[0058] The following conclusions may be drawn from the general effective media model of FIG. 28. First, ϵ_{1n} and ϵ_{2n} are fundamental parameters which permit independent control of the TM modes, and hence the dominant TM mode cutoff frequency. Second, μ_{1n} and μ_{2n} are fundamental parameters which permit independent control of the TE modes, and hence the dominant TE mode cutoff frequency.

[0059] One way to distinguish between prior art high impedance surface 100 of FIG. 1 and an AMC such as AMC 800 (FIG. 8) or AMC 900 (FIG. 9, FIG. 10) is by examining the differences in the elements of the $\underline{\mu}_i$ and $\underline{\epsilon}_i$ tensors. FIG. 29 shows a prior art high impedance surface 100 whose frequency selective surface 102 is a coplanar layer of square conductive patches of size $b \times b$, separated by a gap of dimension g . In the high impedance surface 100, ϵ_D is the relative permittivity of the background or host dielectric media in the spacer layer 104, μ_D is the relative permeability of this background media in the spacer layer 104, and α is the ratio of cross sectional area of each rod or post to the area A of the unit cell in the rodged media or spacer layer 104. The relative permittivity $\epsilon_{avg} = \frac{1+\epsilon_D}{2}$ is the average of the relative dielectric constants of air and the background media in the spacer layer 104. C denotes the fixed FSS

sheet capacitance.

[0060] The permittivity tensor for both the high-impedance surface 100 and the AMCs 800, 900 is uniaxial, or $\epsilon_{ix} = \epsilon_{iy} = \epsilon_{iz} = \epsilon_{in}$; $i=1, 2$ with the same being true for the permeability tensor. The high impedance surface 100 has a square lattice of both rods and square patches, each having the same period. Therefore, unit cell area $A = (g + b)^2$. Also, $\alpha = (\pi d^2/4)/A$, where d is the diameter of the rods or posts. The dimensions of the rods or posts are very small relative to the wavelength at the resonance frequencies. The rods or posts may be realized by any suitable physical embodiment, such as plated-through holes or vias in a conventional printed circuit board or by wires inserted through a foam. Any technique for creating a forest of vertical conductors (i.e., parallel to the z axis), each conductor being electrically coupled with the ground plane, may be used. The conductors or rods may be circular in cross section or may be flat strips of any cross section whose dimensions are small with respect to the wavelength λ in the host medium or dielectric of the spacer layer. In this context, small dimensions for the rods are generally in the range of $\lambda/1000$ to $\lambda/25$.

[0061] In some embodiments, the AMC 800 has transverse permittivity in the y tensor direction substantially equal to the transverse permittivity in the x tensor direction. This yields an isotropic high impedance surface in which the impedance along the y axis is substantially equal to the impedance along the x axis. In alternative embodiments, the transverse permittivity in the y tensor direction does not equal the transverse permittivity in the x tensor direction to produce an anisotropic high impedance surface, meaning the impedances along the two inplane axes are not equal. Examples of the latter are shown in Figures 17 and 21.

[0062] Effective media models for substantially modelling both the high impedance surface 100 and an AMC 800, 900 are listed in Table 2. Two of the tensor elements are distinctly different in the AMC 800, 900 relative to the prior art high-impedance surface 100. These are the transverse permittivity ϵ_{1x} , ϵ_{1y} and the normal permeability μ_{1z} , both of the upper layer or frequency selective surface. The model for the lower layer or spacer layer is the same in both the high impedance surface 100 and the AMC 800, 900.

Table 2

	High impedance surface 100	AMC 800, 900
FSS Layer (upper layer)	$\epsilon_{1x} = \epsilon_{1y} = \frac{C}{\epsilon_0 t}$	$\epsilon_{1x} = \epsilon_{1y} = \frac{Y(\omega)}{j\omega\epsilon_0 t}$
	$\epsilon_{1z} = 1$	$\epsilon_{1z} = 1$
	$\mu_{1x} = \mu_{1y} = 1$	$\mu_{1x} = \mu_{1y} = 1$
	$\mu_{1z} = \frac{2\epsilon_{avg}}{\epsilon_{1x}}$	$\mu_{1z} = \frac{Z(\omega)}{j\omega\mu_0 t}$
Spacer layer (lower layer)	$\epsilon_{2x} = \epsilon_{2y} = \epsilon_D \left(\frac{1+\alpha}{1-\alpha} \right)$	$\epsilon_{2x} = \epsilon_{2y} = \epsilon_D \left(\frac{1+\alpha}{1-\alpha} \right)$
	$\epsilon_{2z} = \epsilon_D - \frac{1}{\omega^2 \epsilon_0 \mu_0 \mu_D \frac{A}{4\pi} \left[\ln\left(\frac{1}{\alpha}\right) + \alpha - 1 \right]}$	Same as High impedance surface 100
	$\mu_{2x} = \mu_{2y} = \frac{\epsilon_D}{\epsilon_{2x}} \mu_D$	$\mu_{2x} = \mu_{2y} = \frac{\epsilon_D}{\epsilon_{2x}} \mu_D$
	$\mu_{2z} = (1-\alpha)\mu_D$	$\mu_{2z} = (1-\alpha)\mu_D$

[0063] In Table 2, $Y(\omega)$ is an admittance function written in the second Foster canonical form for a one port circuit:

$$Y(\omega) = j\omega C_\infty + \frac{1}{j\omega L_o} + \sum_{n=1}^N \frac{1}{R_n + j\omega L_n + \frac{1}{j\omega C_n}}$$

[0064] This admittance function $Y(\omega)$ is related to the sheet capacitance ($C = \epsilon_1 \epsilon_o \ell$) of the FSS 802 of the AMC 800, 900 by the relation $Y = j\omega C$. The high impedance surface 100 has an FSS capacitance which is frequency independent. However, the AMC 800, 900 has an FSS 802 whose capacitance contains inductive elements in such a way that the sheet capacitance undergoes one or more Lorentz resonances at prescribed frequencies. Such resonances are accomplished by integrating into the FSS 802 the physical features of resonant loop structures, also referred to as artificial magnetic molecules. As the frequency of operation is increased, the capacitance of the FSS 802 will undergo a series of abrupt changes in total capacitance.

[0065] FIG. 30 illustrates sheet capacitance for the frequency selective surface 802 of the AMC 800 of FIG. 8 and the AMC 900 of FIG. 9. FIG. 30(a) shows that the capacitance of the FSS 802 is frequency dependent. FIG 30(b) shows a Debye response obtained from a lossy FSS where R_n is significant. In FIG. 30, two FSS resonances ($\omega_n = 1/\sqrt{L_n C_n}$, $N=2$) are defined. The drop in capacitance across each resonant frequency is equal to C_n , the capacitance in each shunt branch of $Y(\omega)$. Although the regions of rapidly changing capacitance around a Lorentz resonance may be used to advantage in narrowband antenna requirements, some embodiments may make use of the more slowly varying regions, or plateaus, between resonances. This FSS capacitance is used to tune the inductance of the spacer layer 804, which is a constant, to achieve a resonance in the reflection coefficient phase for the AMC 800, 900. This multi-valued FSS capacitance as a function of frequency is the mechanism by which multiple bands of high surface impedance are achieved for the AMC 800, 900.

[0066] In contrast, the two-layer high impedance surface 100 will offer reflection phase resonances at a fundamental frequency, plus higher frequencies near where the electrical thickness of the bottom layer is $m\pi$ and n is an integer. These higher frequency resonances are approximately harmonically related, and hence uncontrollable.

[0067] A second difference in the tensor effective media properties for the high impedance surface 100 and AMC 800 is in the normal permeability component μ_{1n} . The high impedance surface 100 has a constant μ_{1n} , whereas the AMC 800, 900 is designed to have a frequency dependent μ_{1n} . The impedance function $Z(\omega)$ can be written in the first Foster canonical form for a one-port circuit.

$$Z(\omega) = j\omega L_\infty + \frac{1}{j\omega C_o} + \sum_{n=1}^N \frac{1}{G_n + j\omega C_n + \frac{1}{j\omega L_n}}$$

[0068] This impedance function is sufficient to accurately describe the normal permeability of the FSS 802 in an AMC 800, 900 regardless of the number and orientation of uniquely resonant artificial magnetic molecules.

[0069] The prior art high-impedance surface 100, whose FSS 102 is composed of metal patches, has a lower bound for μ_{1n} . This lower bound is inversely related to the transverse permittivity according to the approximate relation $\mu_{1n} \approx 2/\epsilon_{1t}$. Regardless of the FSS sheet capacitance, μ_{1n} is anchored at this value for the prior art high-impedance surface 100. However, a normal permeability which is lower than $\mu_{1n} = 2/\epsilon_{1t}$ is needed to cut off the guided bound TE mode in all of the high-impedance bands of a multi-band AMC such as AMC 800 and AMC 900.

[0070] The overlapping loops used in the FSS 802 of the AMC 800, 900 allow independent control of the normal permeability. Normal permeabilities may be chosen so that surface wave suppression occurs over some and possibly all of the $\pm 90^\circ$ reflection phase bandwidths in a multi-band AMC such as AMC 800 and AMC 900. The illustrated embodiment uses arrays of overlapping loops as the FSS layer 802, or in conjunction with a capacitive FSS layer, tuned individually or in multiplicity with a capacitance. This capacitance may be the self capacitance of the loops, the capacitance offered by adjacent layers, or the capacitance of external capacitors attached to the FSS, such as chip capacitors. The loops and capacitance are tuned so as to obtain a series of Lorentz resonances across the desired bands of operation. Just as in the case of the resonant FSS transverse permittivity, the resonances of the artificial magnetic molecules affords the designer a series of staircase steps of progressively dropping normal permeability. Again, the region of rapidly changing normal permeability around the resonances may be used to advantage in narrowband operations. However, the illustrated embodiment uses plateaus of extended depressed normal permeability to suppress the onset of guided bound TE surface waves within the desired bands of high-impedance operation.

[0071] In summary, the purpose of the resonance in the effective transverse permittivities ϵ_{1t} is to provide multiple bands of high surface impedance. The purpose of the resonances in the normal permeability μ_{1n} is to depress its value so as to prevent the onset of TE modes inside the desired bands of high impedance operation.

[0072] In some applications, an artificial magnetic conductor having more than two layers of loops separated by more than a single dielectric layer may provide important performance advantages. FIG. 31 illustrates an artificial magnetic conductor 3100 including a multiple layer frequency selective surface (FSS) 3102. The AMC 3100 further includes a conductive ground plane 3104 and a rodged media forming a spacer layer 3106 disposed between the FSS 3102 and the conductive ground plane 3104. The FSS 3102 has a frequency dependent permeability μ_{1z} in a direction normal to the frequency dependent surface 3102. Exemplary dimensions and coordinate axes are shown in FIG. 31.

[0073] The FSS 3102 includes three arrays of substantially coplanar artificial magnetic molecules. The artificial magnetic molecules are preferably implemented as overlapping capacitively coupled loops. In the embodiment of FIG. 31, the FSS 3102 includes a first array 3112, a second array 3114 and a third array 3116 of artificial magnetic molecules. A first dielectric layer 3118 separates the first array 3112 of artificial magnetic molecules from the second array 3114 of artificial magnetic molecules.

[0074] The arrays 3112, 3114, 3116 are shown as being coplanar in respective planes. This arrangement is particularly well suited to manufacture using conventional printed circuit board (PCB) manufacturing techniques of depositing a metallic layer on a PCB surface and etching with a chemical or other process. In other embodiments, other manufacturing techniques, some of which will produce arrays of artificial magnetic molecules which are not substantially coplanar, may be substituted.

[0075] Also, the AMC 3100 includes three layers 3112, 3114, 3116 of loops separated by two dielectric layers 3118, 3120. In other embodiments, other combinations of layers of loops and dielectric layers may be used. In general, a FSS in accordance with the disclosed embodiments will include n layers of loops and $n-1$ dielectric layers isolating the layers of loops.

[0076] The spacer layer 3106 includes metallic rods 3108 periodically positioned in a dielectric material. Preferably, each loop of each array of loops 3112, 3114, 3116 is associated with a rod 3108 of the spacer layer 3106. Any suitable manufacturing method, for example, as described above, may be used to manufacture the rodged media of the spacer layer 3108.

[0077] FIG. 32 illustrates a top view of the multiple-layer frequency selective surface 3102 of FIG. 31. FIG. 32 shows the first array 3112, the second array 3114 and the third array 3116 of the frequency selective surface 3102. A portion only of each array is visible to illustrate the layering of the respective arrays.

[0078] In FIG. 32, each of the arrays 3112, 3114, 3116 includes substantially identical hexagonal loops periodically spaced on the FSS 3102. Each loop is notched to tailor the self-inductance of the loop and includes a gap to tailor the resonant frequency of the loop. The embodiment of FIGS. 31 and 32 is illustrative only. In other embodiments, different size and shape loops may be used along with different numbers of layers or arrays.

[0079] From the foregoing, it can be seen that the present embodiments provide a variety of high-impedance surfaces or artificial magnetic conductors which exhibit multiple reflection phase resonances, or multi-band performance. The resonant frequencies for high surface impedance are not harmonically related, but occur at frequencies which may be designed or engineered. This is accomplished by designing the tensor permittivity of the upper layer to have a behavior with frequency which exhibits one or more Lorentzian resonances.

[0080] While a particular embodiment of the present invention has been shown and described, modifications may be made. Other methods of making or using anisotropic materials with negative axial permittivity and depressed axial permeability, for the purpose of constructing multiband surface wave suppressing AMCs, such as by using artificial dielectric and magnetic materials, are extensions of the embodiments described herein. Any such method can be used to advantage by a person ordinarily skilled in the art by following the description herein for the interrelationship between the Lorentz material resonances and the positions of the desired operating bands. Accordingly, it is therefore intended in the appended claims to cover such changes and modifications which follow in the true spirit and scope of the invention.

Claims

1. An antenna system characterized by:

an artificial magnetic conductor (AMC) (300) including

a frequency selective surface having a frequency dependent permeability μ_{1z} in a direction normal to the frequency dependent surface;
a conductive ground plane (806) and

a rodged media (808) disposed between the frequency selective surface and the conductive ground plane.

2. The antenna system of claim 1 further **characterized by**:

an antenna (304) in proximity to the AMC.

3. The antenna system of claim 2 wherein the frequency selective surface is **characterized by**:

a plurality of substantially identical periodically spaced loops (804) which are substantially coplanar and substantially uniformly spaced a distance h from the conductive ground plane.

4. The antenna system of 3 wherein the loops **characterized by** a low frequency limit of transverse effective relative permittivity ϵ_{1x} and ϵ_{1y} in the plane of the frequency selective surface in the range 100 to 2000.

5. The antenna system of claim 2 wherein the frequency selective surface is **characterized by** a normal permeability μ_{1z} which exhibits one or more Lorentz material resonances at particular frequencies.

6. The antenna system of claim 1 wherein the AMC is characterized to be resonant with a substantially zero degree reflection phase over two or more AMC resonant frequency bands and wherein the rodged media comprises a spacer layer including an array of metal posts extending through the spacer layer and wherein the a frequency selective surface (FSS) is disposed on the spacer layer, the frequency selective surface, as an effective media, having one or more Lorentz resonances at predetermined frequencies different from the two or more AMC resonant frequency bands.

7. An antenna system **characterized by**:

an artificial magnetic conductor (300) including

a conductive ground plane (806),
a spacer layer (808) disposed on the ground plane, and
one or more arrays of coplanar loops (804) resonant at two or more frequency bands, each loop having a similar shape and similar size, the one or more arrays of coplanar loops producing a frequency dependent normal permeability μ_z ; and

an antenna (304) proximate the artificial magnetic conductor.

8. The antenna system of claim 7 wherein the one or more arrays of coplanar loops are **characterized by**:

a first array (902) of loops regularly spaced a with a period P in a first plane;
and
a second array (904) of loops regularly spaced in a second plane.

9. The antenna system of claim 7 further **characterized by** external capacitors to produce a series capacitance between adjacent loops.

10. The antenna system of claim 7 further **characterized by** one or more dielectric layers separating each of the one or more arrays of coplanar loops.

11. An antenna system **characterized by**:

a conductive ground plane (806);
a dielectric layer (912) perforated by conductive rods (808) in electrical contact with the conductive ground plane;
a frequency selective surface (910) disposed on the dielectric layer and including

a first layer (902) of capacitively coupled loops resonant at a first frequency,
a dielectric spacer layer, and
a second layer (904) of capacitively coupled loops resonant at a second frequency, the frequency selective

surface having a frequency dependent permeability in a direction substantially normal to the frequency selective surface; and

an antenna (304) positioned proximate the frequency selective surface.

12. An artificial magnetic conductor (300) resonant with a substantially zero degree reflection phase over at least two resonant frequency bands, the artificial magnetic conductor **characterized by** a frequency selective surface having a plurality of Lorentz resonances in transverse permittivity at independent, non-harmonically related, predetermined frequencies different from the resonant frequency bands.

13. An artificial magnetic conductor (AMC) (300) resonant at multiple resonance frequencies, the AMC **characterized by** an effective media model, the effective media model **characterized by**:

a first layer and a second layer, each layer having a layer tensor permittivity and a layer tensor permeability, each layer tensor permittivity and each layer tensor permeability having non-zero elements on a main diagonal only, x and y tensor directions being in-plane with each respective layer and z tensor direction being normal to each layer.

14. The AMC of claim 13 wherein the effective media model is further **characterized by**:

a first layer **characterized by** transverse permittivities in the y tensor direction and the x tensor direction which are variable with frequency and which exhibit one or more Lorentz resonances.

15. The AMC of claim 14 wherein the transverse permittivity of the first layer is modeled by $\epsilon_{1t} = \frac{Y(\omega)}{j\omega\epsilon_0 t}$ where $Y(\omega)$ is an admittance function described by Foster's second canonical form for a one port circuit,

$$Y(\omega) = j\omega C_\infty + \frac{1}{j\omega L_o} + \sum_{n=1}^N \frac{1}{R_n + j\omega L_n + \frac{1}{j\omega C_n}},$$

where j is the imaginary operator, ω is radian frequency, ϵ_0 is the permittivity of free space, C_∞ is the asymptotic limit on transverse capacitance of the first layer as ω approaches an infinite value, L_o is the asymptotic limit on shunt inductance of the model as ω approaches 0, R_n is a branch resistance, L_n is a branch inductance and C_n is a branch capacitance.

16. An artificial magnetic conductor (300) operable over at least a first high-impedance frequency band and a second high-impedance frequency band as a high-impedance surface, the artificial magnetic conductor being defined by an effective media model **characterized by**:

a spacer layer; and

a frequency selective surface (FSS) disposed adjacent the spacer layer and having a transverse permittivity ϵ_{1t} defined by $\epsilon_{1x} = \epsilon_{1y} = \frac{Y(\omega)}{j\omega\epsilon_0 t}$, wherein $Y(\omega)$ is a frequency dependent admittance function for the frequency selective surface, j is the imaginary operator, ω corresponds to angular frequency, ϵ_0 is the permittivity of free space, and t corresponds to thickness of the frequency selective surface.

17. The artificial magnetic conductor of claim 16 wherein the FSS layer has a normal permeability μ_{1z} defined by $\mu_{1z} = \frac{Z(\omega)}{j\omega\mu_0 t}$, wherein $Z(\omega)$ is a frequency dependent impedance function, j is the imaginary operator, ω corresponds to angular frequency, μ_0 is the permeability of free space, and t corresponds to thickness of the frequency selective surface.

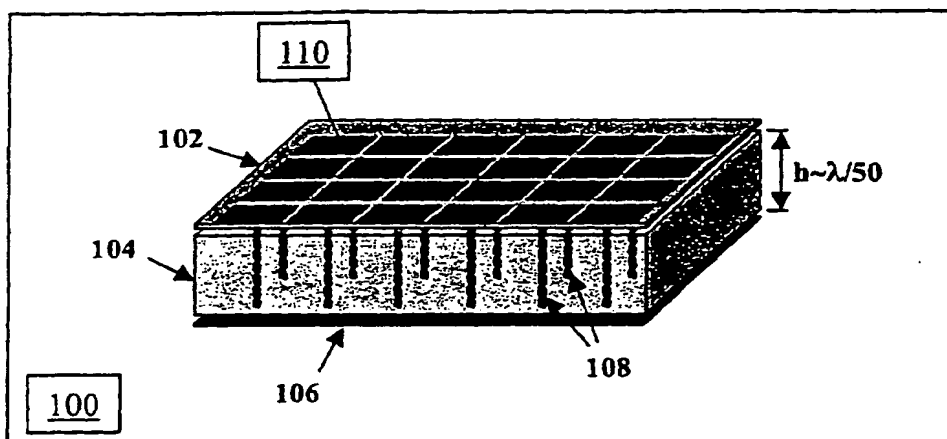


FIG. 1 (Prior Art)

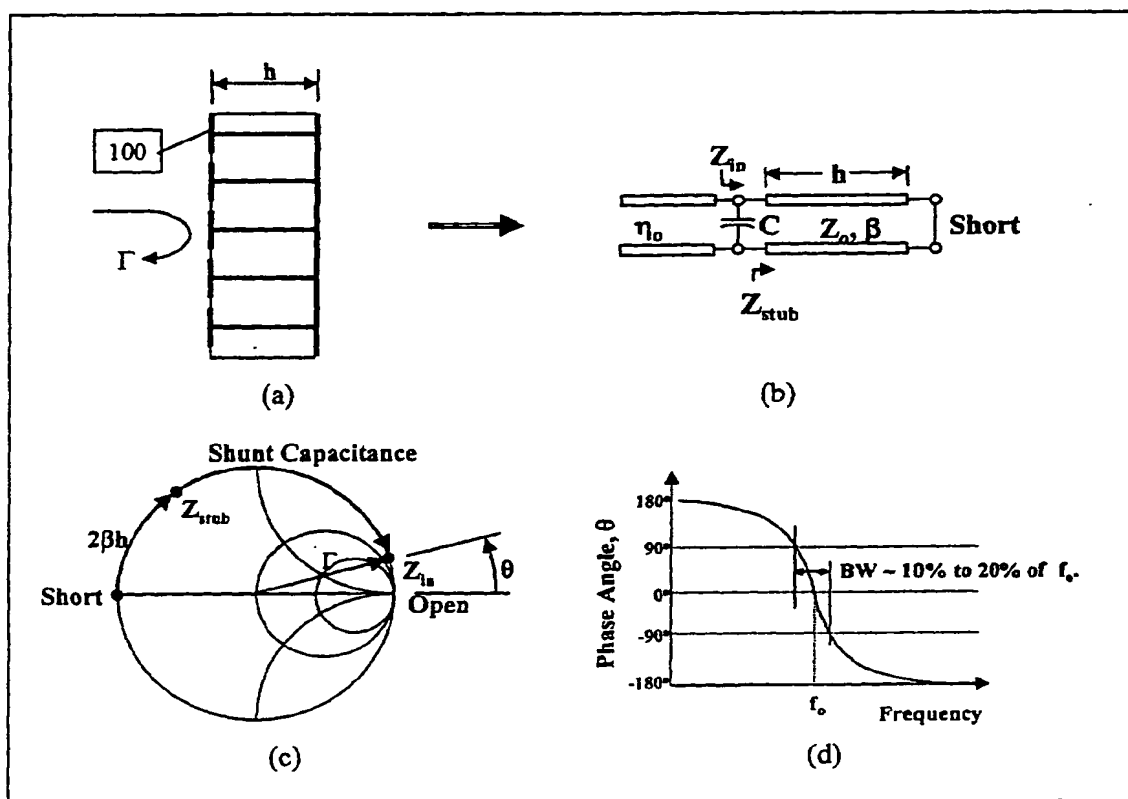


FIG. 2 (Prior Art)

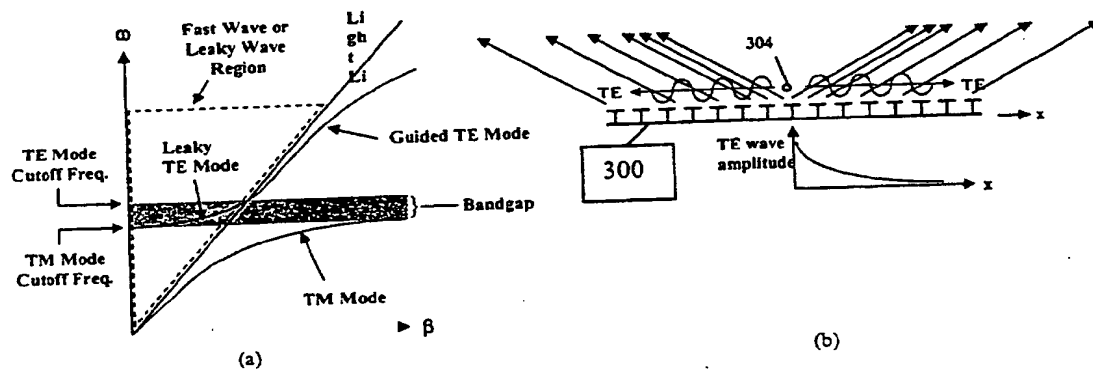


FIG. 3

TE Mode propagating in the x direction:

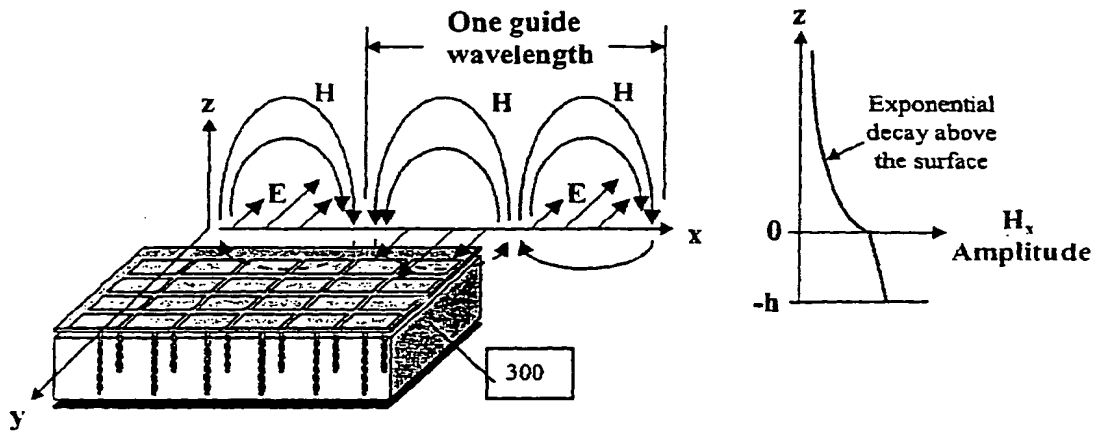


FIG. 4

TM Mode propagating in the x direction:

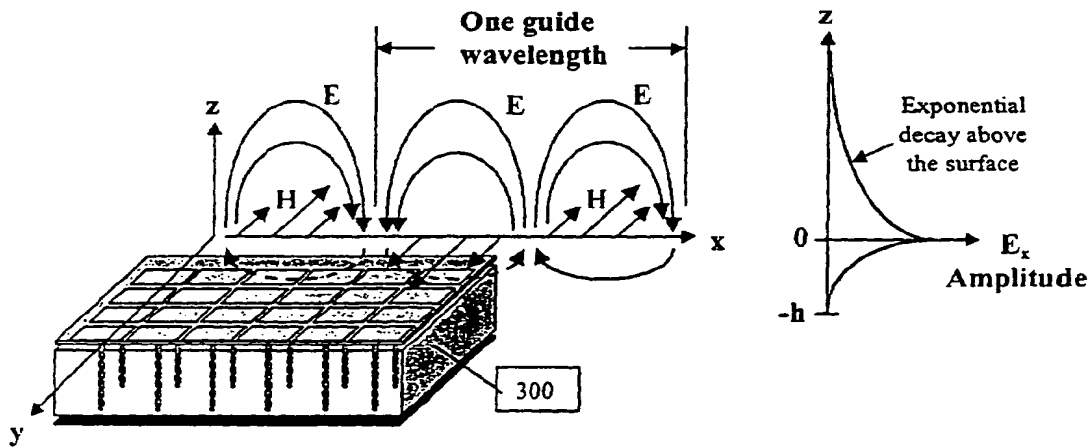


FIG. 5


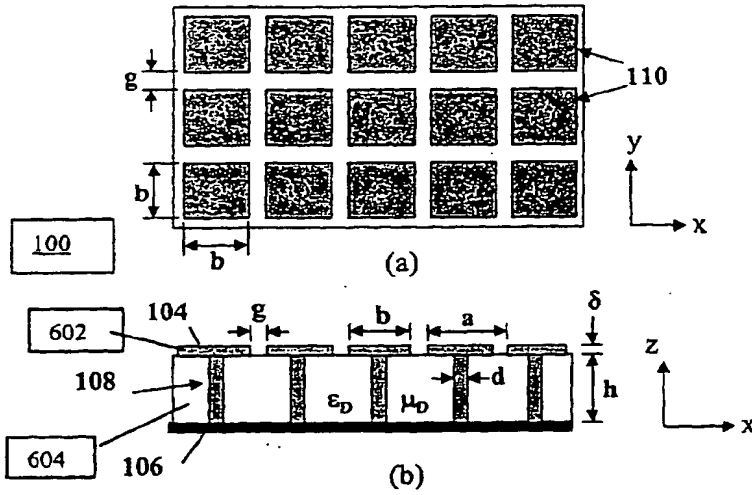


FIG. 6 (Prior Art)



$$\underline{\epsilon}_i = \epsilon_o \begin{pmatrix} \epsilon_{ix} & 0 & 0 \\ 0 & \epsilon_{iy} & 0 \\ 0 & 0 & \epsilon_{iz} \end{pmatrix} \quad \underline{\mu}_i = \mu_o \begin{pmatrix} \mu_{ix} & 0 & 0 \\ 0 & \mu_{iy} & 0 \\ 0 & 0 & \mu_{iz} \end{pmatrix}$$

Upper Layer:

$$\epsilon_{1x} = \epsilon_{1y} = \epsilon_{avg} \frac{2b}{\pi t} \ln \left(\frac{2b}{\pi g} \right)$$

$$\epsilon_{1z} = 1$$

$$\mu_{1x} = \mu_{1y} = 1$$

$$\mu_{1z} = 2 \frac{\epsilon_{avg}}{\epsilon_{1y}} \ll 1$$

where $\epsilon_{avg} = \frac{1 + \epsilon_D}{2}$

Lower Layer:

$$\epsilon_{2x} = \epsilon_{2y} = \epsilon_D \left(\frac{1 + \alpha}{1 - \alpha} \right)$$

$$\mu_{2x} = \mu_{2y} = \frac{\epsilon_D}{\epsilon_{2x}} \mu_D$$

$$\epsilon_{2z} = \epsilon_D - \frac{1}{\omega^2 \epsilon_o \frac{\mu_D \mu_o A}{4\pi} \left[\ln \left(\frac{1}{\alpha} \right) + \alpha - 1 \right]}$$

$$\mu_{2z} = (1 - \alpha) \mu_D$$

where $\alpha = \frac{\text{Cross sectional area of each via}}{\text{Area of the unit cell for the rodged media}}$

ϵ_D = Relative permittivity of the background dielectric
 μ_D = Relative permeability of the background dielectric

FIG. 7

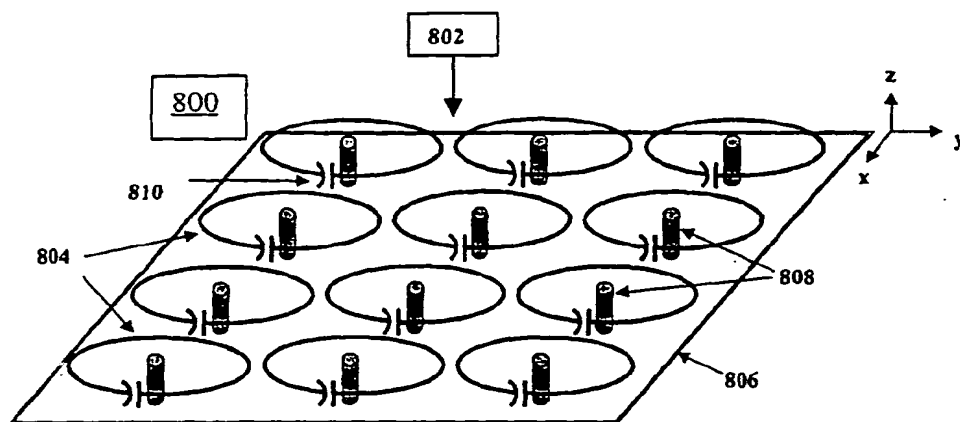


FIG. 8

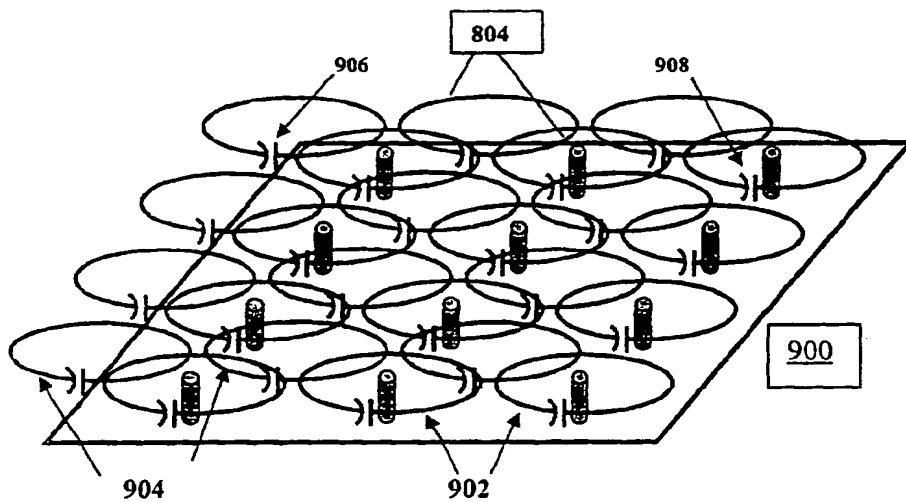


FIG. 9

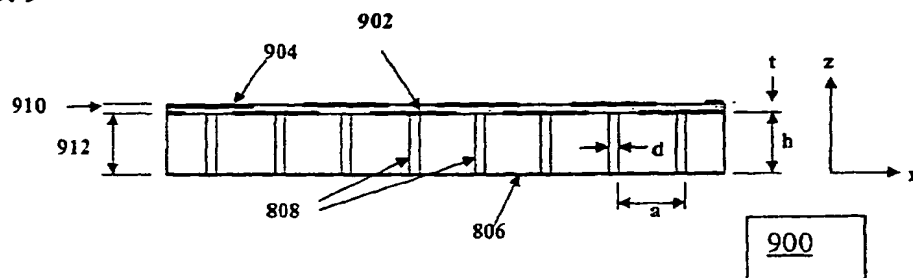


FIG. 10

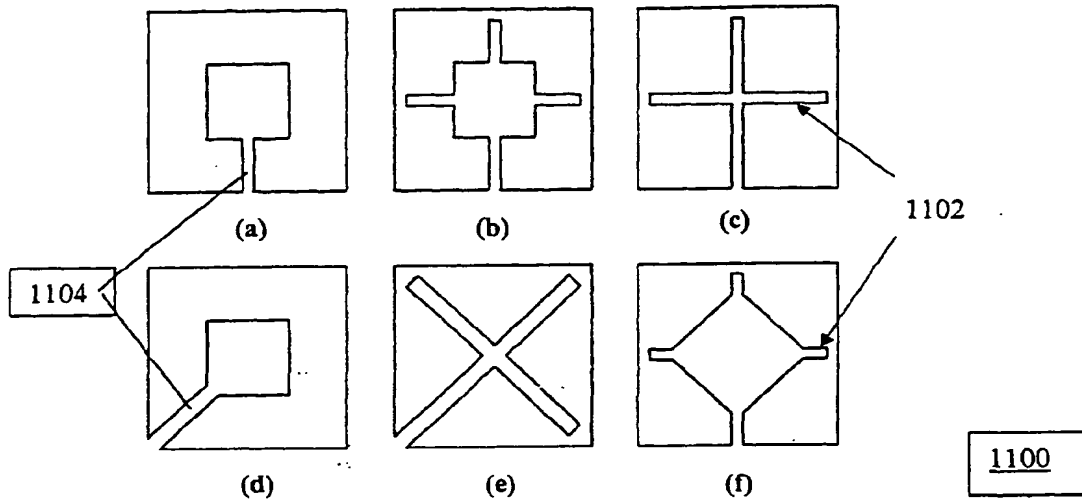


FIG. 11

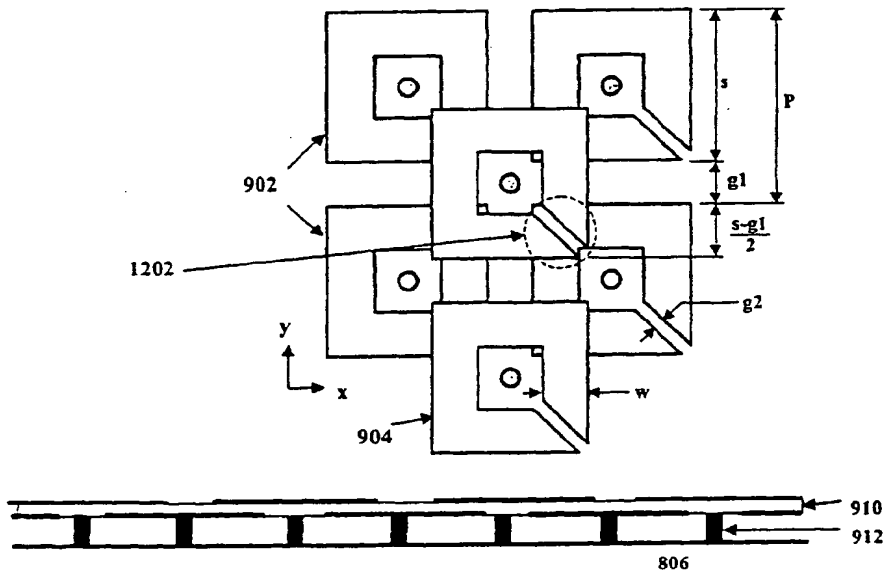


FIG. 12

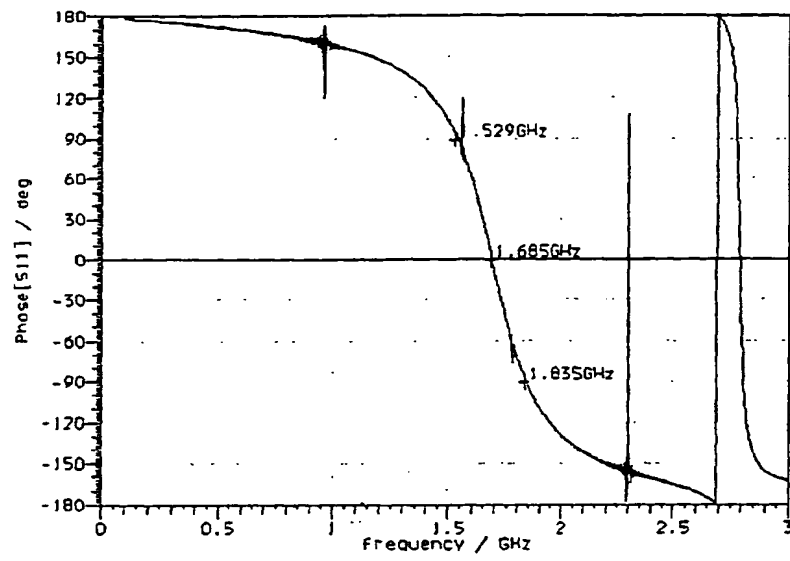


FIG. 13

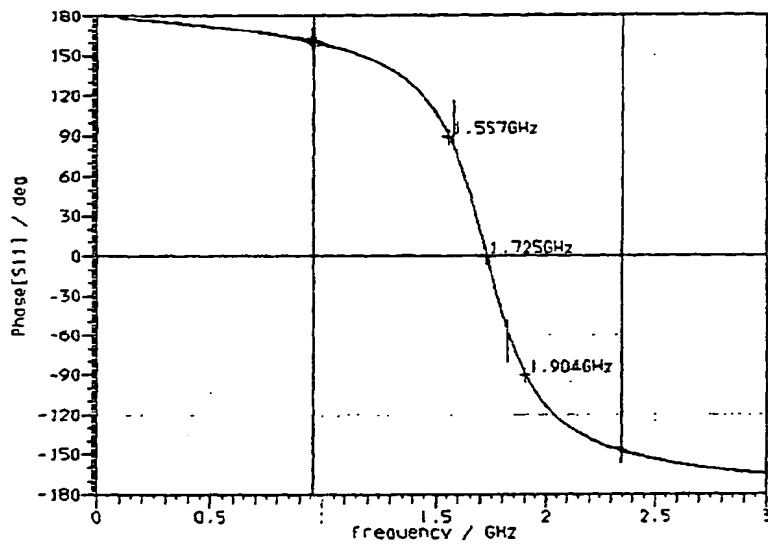


FIG. 14

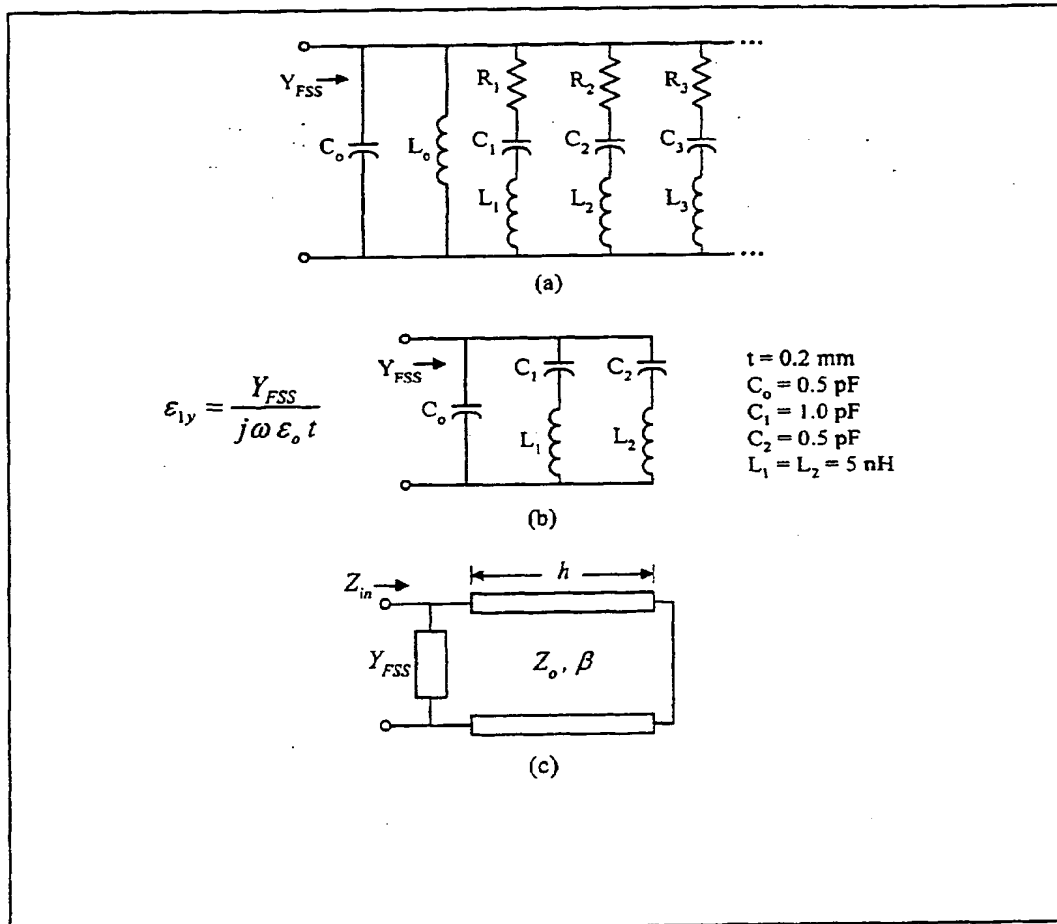


FIG. 15

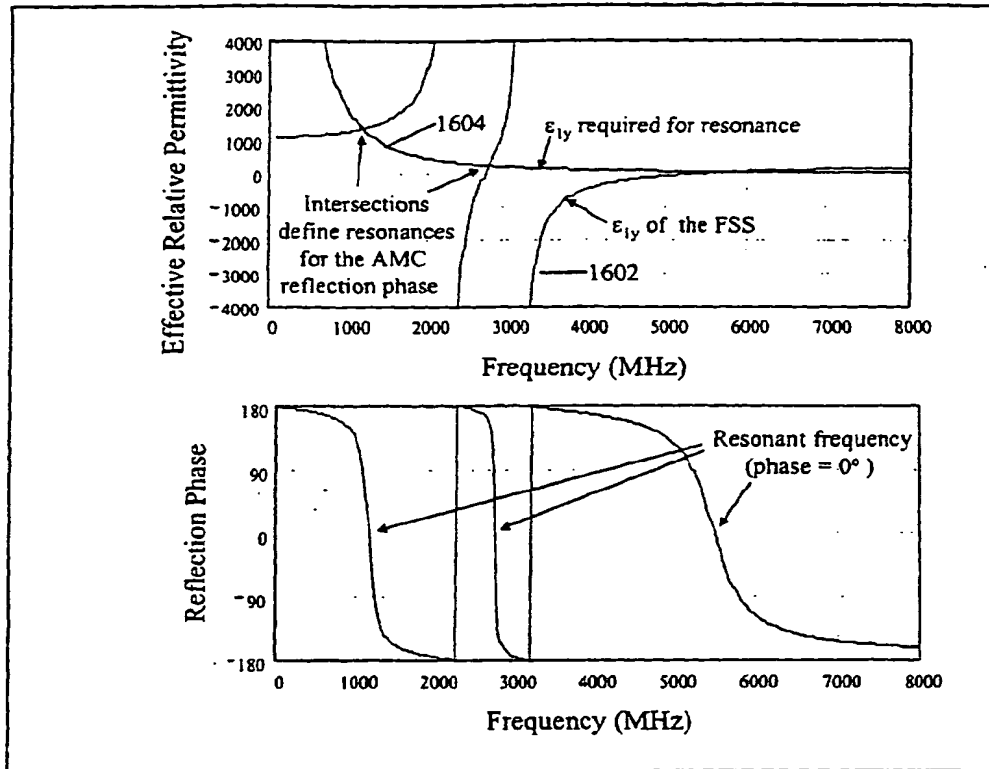


FIG. 16

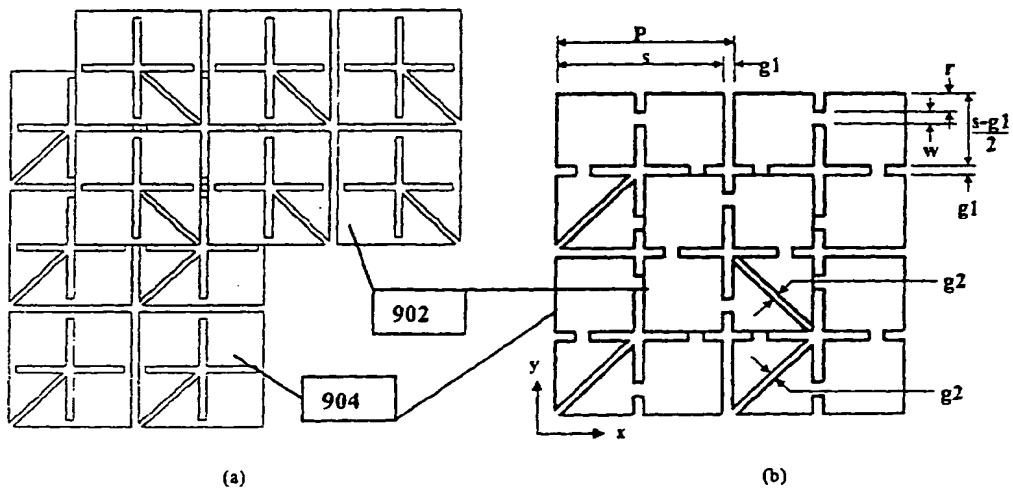


FIG. 17

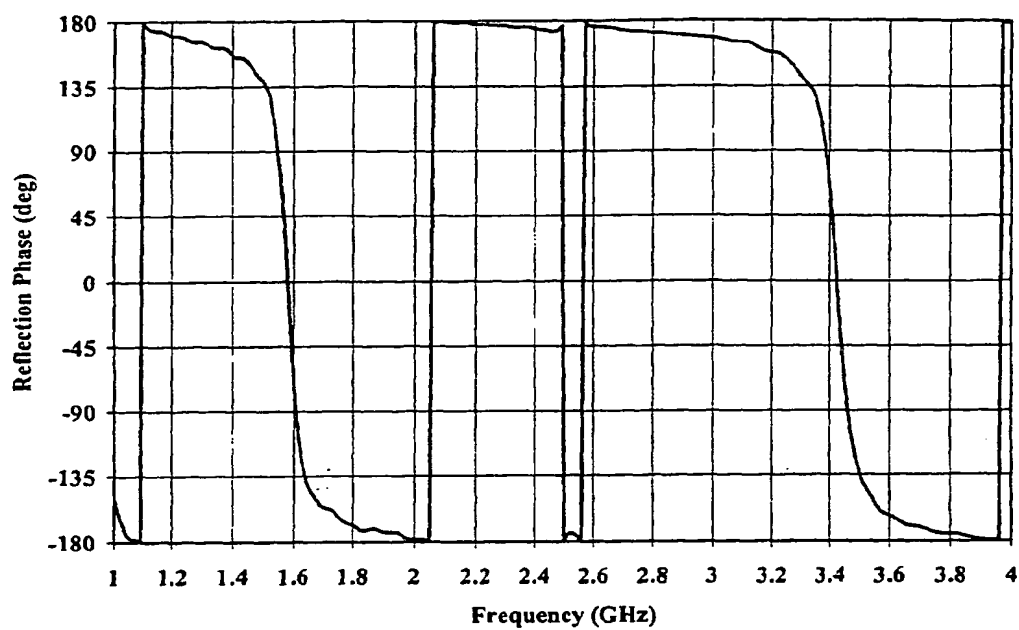


FIG. 18

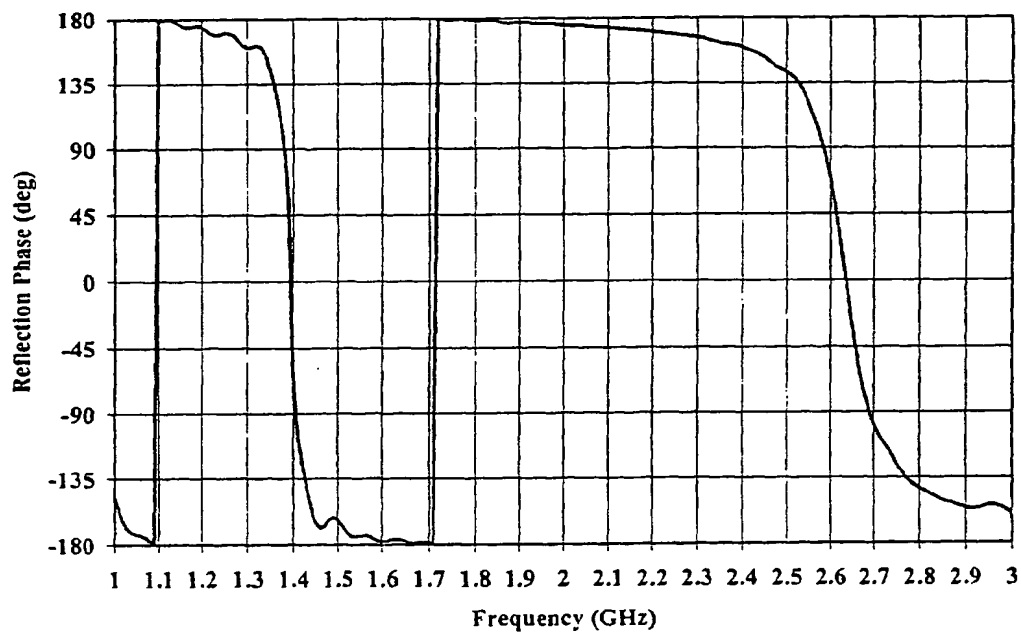


FIG. 19

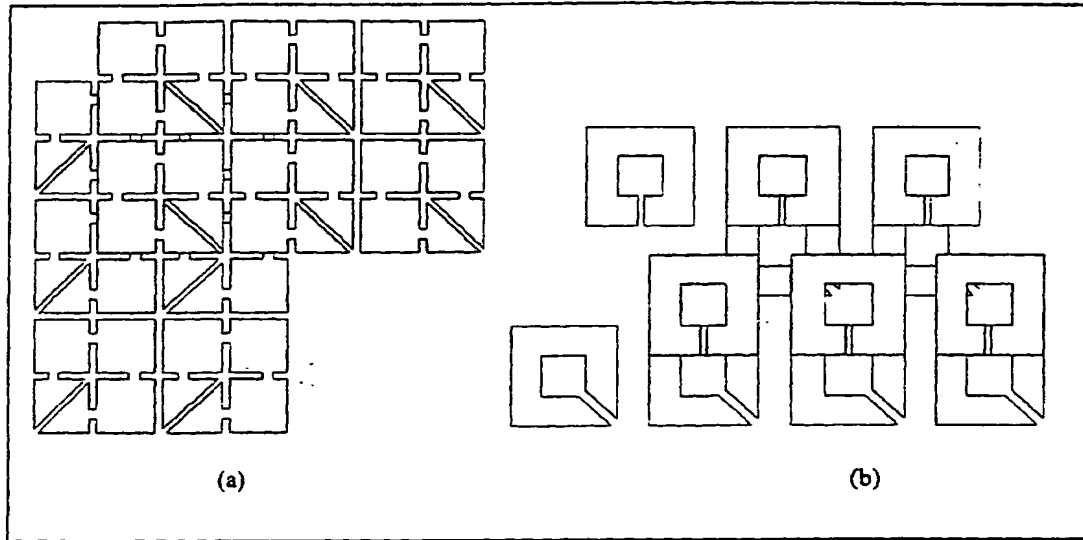


FIG. 20

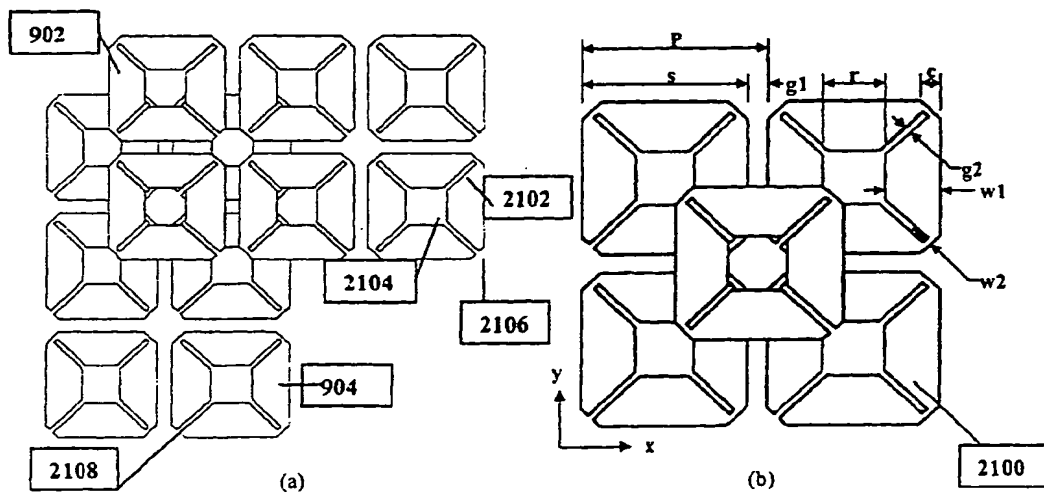


FIG. 21

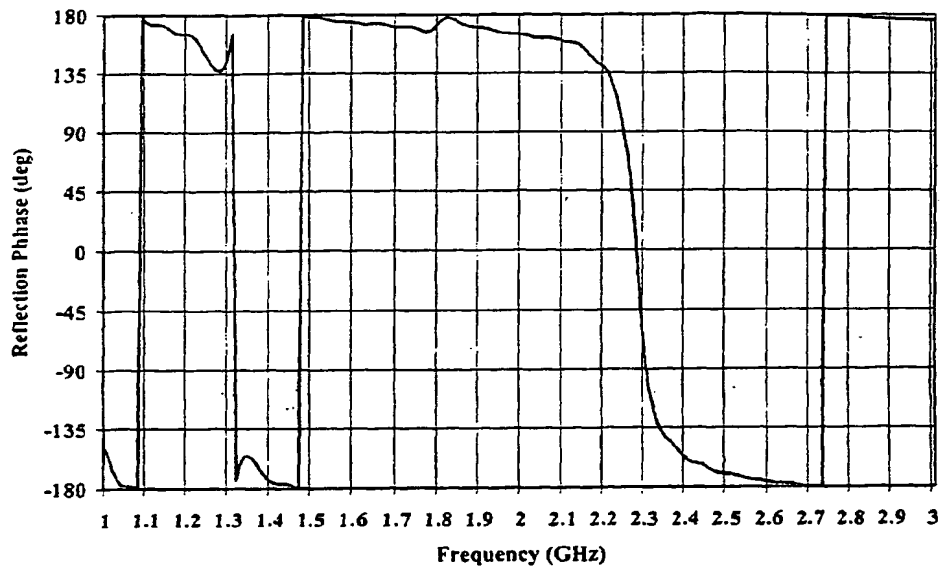


FIG. 22

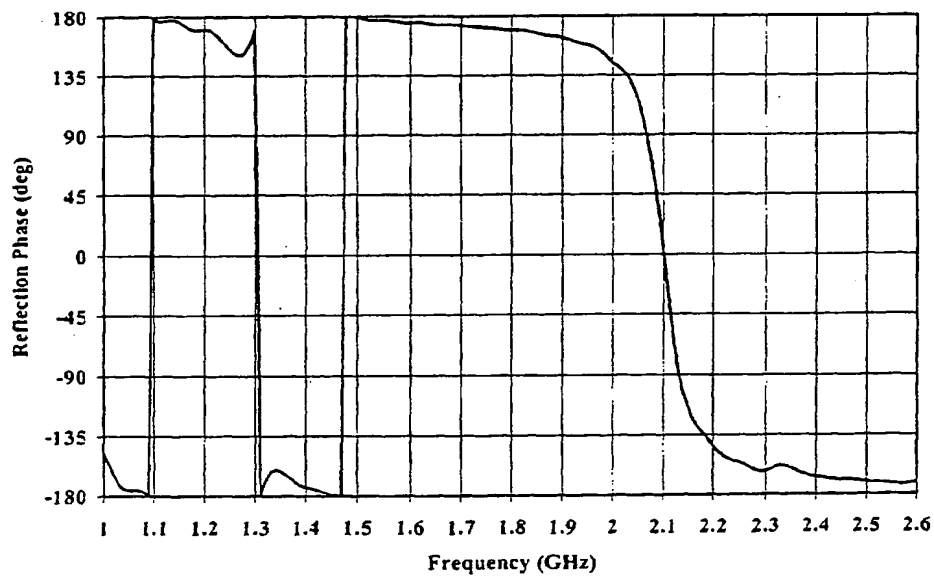


FIG. 23

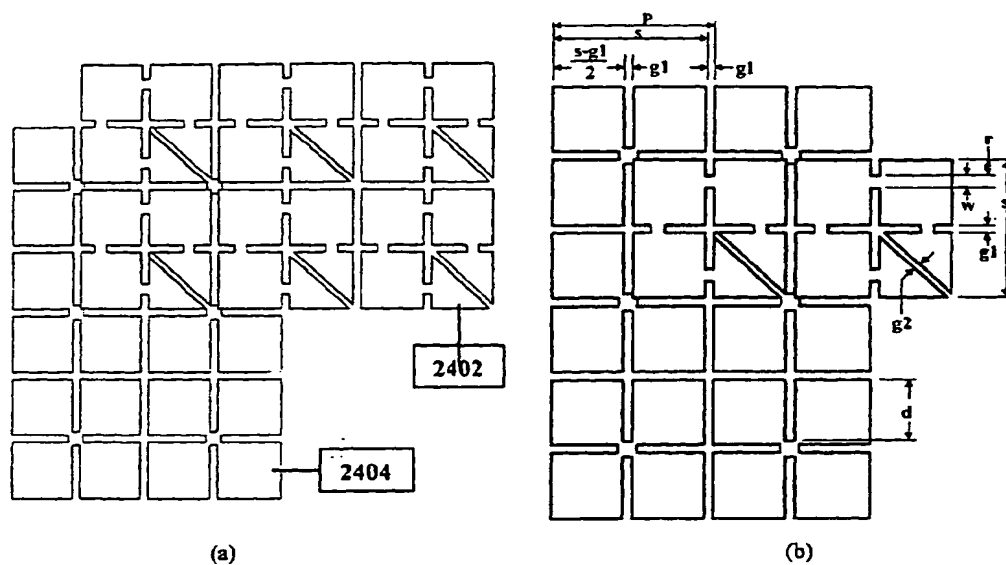


FIG. 24

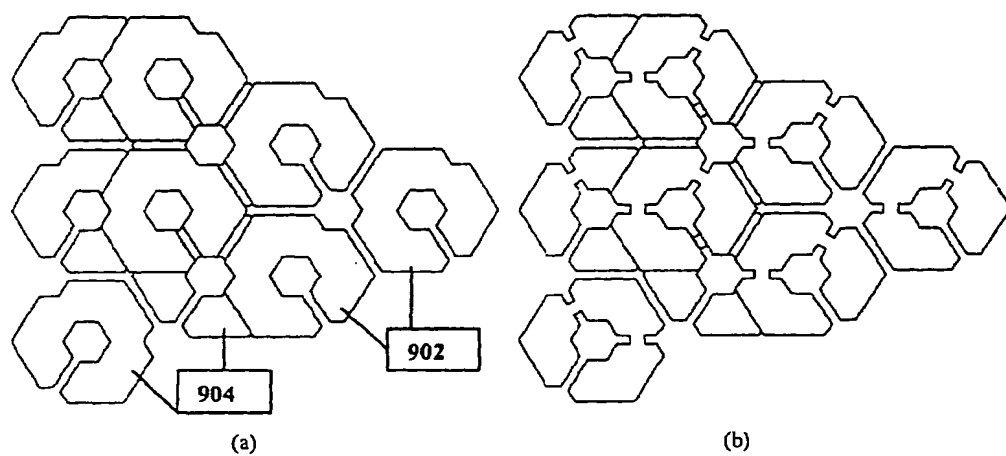


FIG. 25

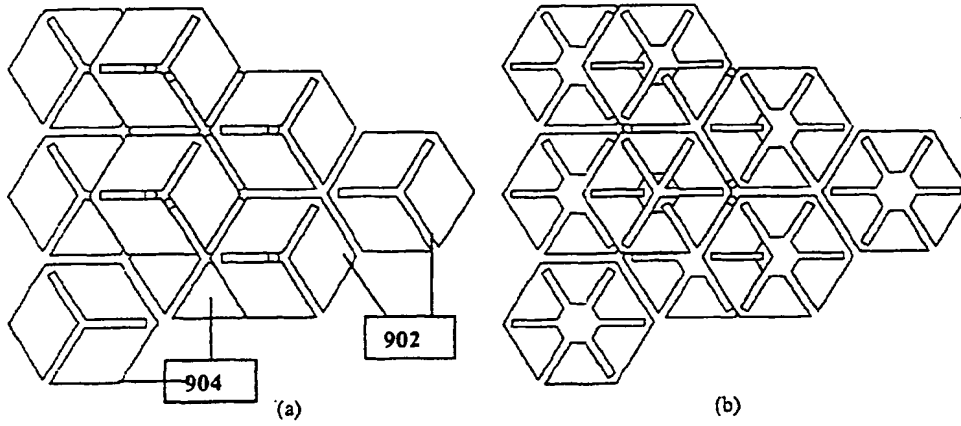


FIG. 26

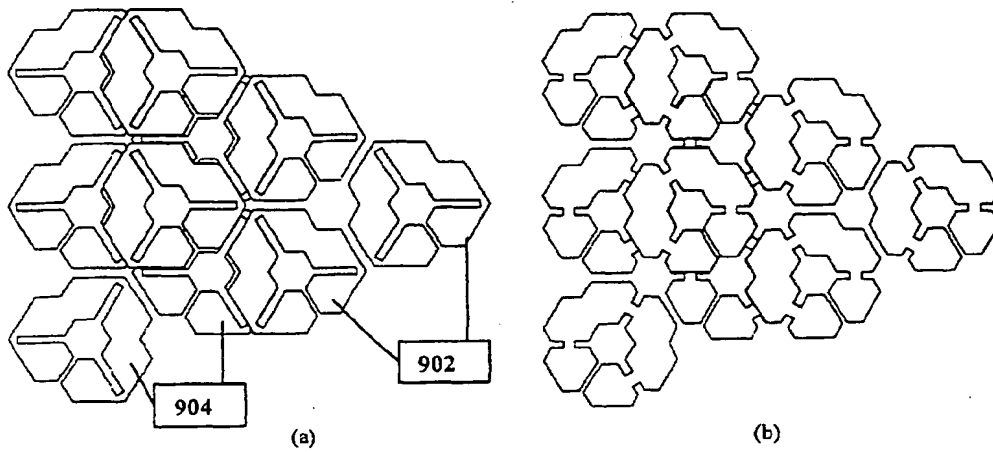


FIG. 27

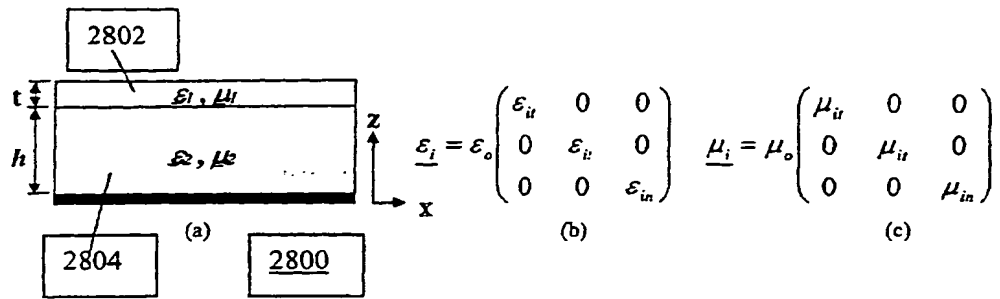


FIG. 28

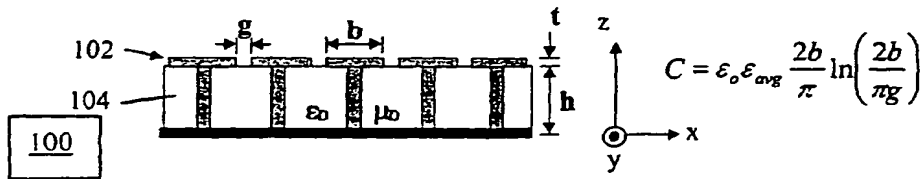


FIG. 29 (Prior Art)

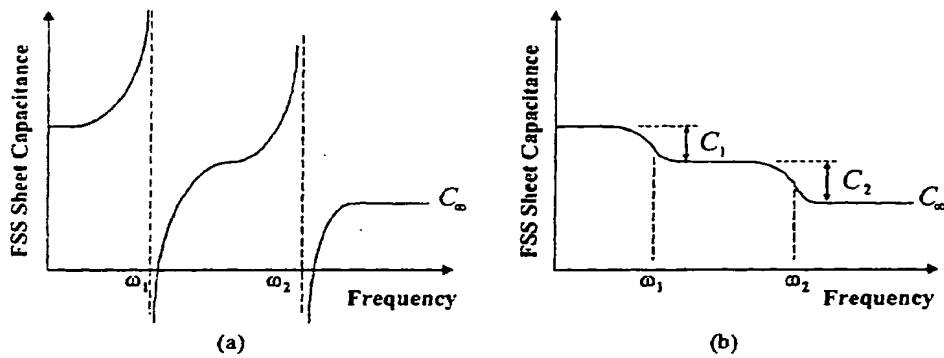


FIG. 30

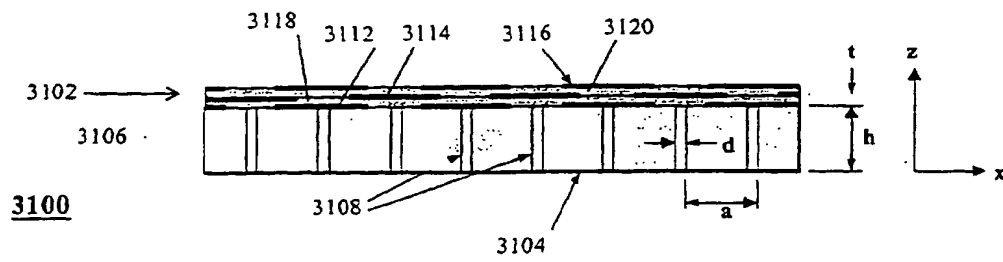


FIG. 31

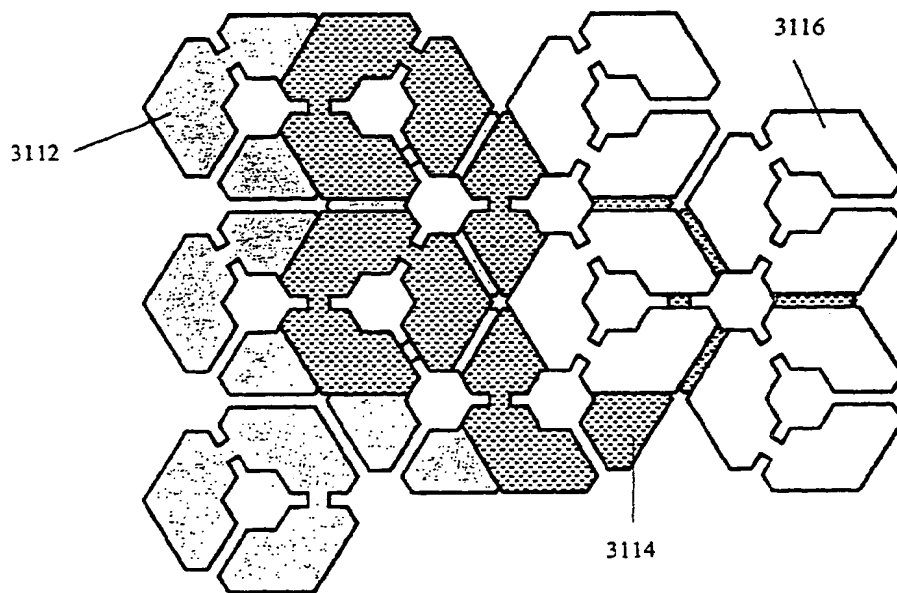


FIG. 32



(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 195 847 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
15.05.2002 Bulletin 2002/20

(51) Int Cl.7: **H01Q 9/04**, H01Q 15/00

(43) Date of publication A2:
10.04.2002 Bulletin 2002/15

(21) Application number: **01308496.7**

(22) Date of filing: **04.10.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Diaz, Rodolfo E.**
Phoenix, Arizona 85048 (US)
• **McKinzie, William E.**
Fulton, Maryland 20759 (US)

(30) Priority: **04.10.2000 US 678128**
01.11.2000 US 704510


(74) Representative:
McLeish, Nicholas Alistair Maxwell et al
Boulton Wade Tennant
Verulam Gardens
70 Gray's Inn Road
London WC1X 8BT (GB)

(71) Applicant: **E-Tenna Corporation**
Laurel, Maryland 20707 (US)

(54) **Multi-resonant, high-impedance surfaces containing loaded-loop frequency selective surfaces**

(57) An antenna system and an artificial magnetic conductor (300) include a frequency selective surface having a frequency dependent permeability μ_{1z} in a di-

rection normal to the frequency dependent surface, a conductive ground plane (806), and a rodged media (808) disposed between the frequency selective surface and the conductive ground plane.

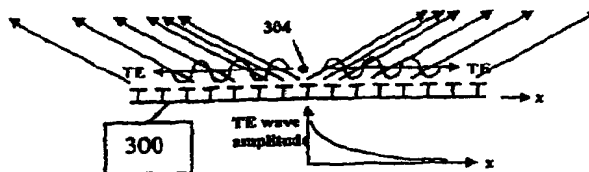

(b)

FIG. 3

EP 1 195 847 A3

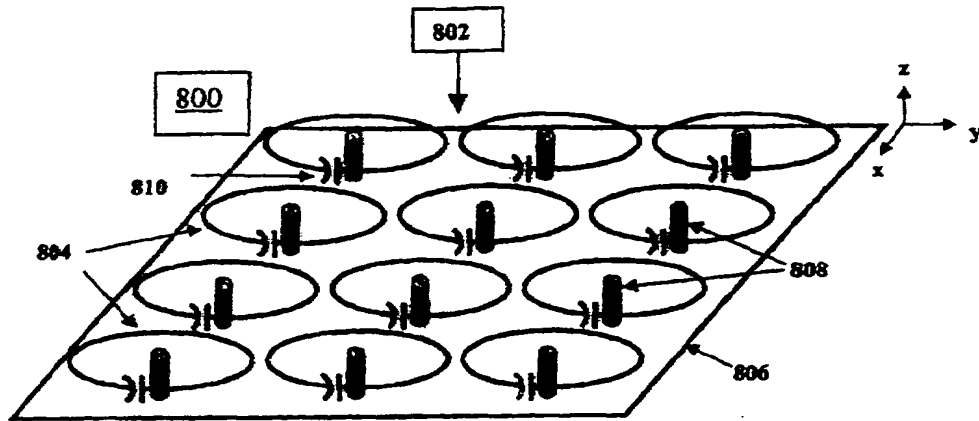


FIG. 8



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 30 8496

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	<p>ABERLE J T ET AL: "Simulation of artificial magnetic materials using lattices of loaded molecules" TERAHERTZ AND GIGAHERTZ PHOTONICS, DENVER, CO, USA, 19-23 JULY 1999, vol. 3795, pages 188-196, XP001038444</p> <p>Proceedings of the SPIE - The International Society for Optical Engineering, 1999, SPIE-Int. Soc. Opt. Eng, USA</p> <p>ISSN: 0277-786X</p> <p>* page 188 - page 196 *</p> <p>---</p>	1-12,16,17	<p>H01Q9/04</p> <p>H01Q15/00</p>
Y	<p>WO 00 41270 A (MARCONI CASWELL LTD ;PENDRY JOHN BRIAN (GB); ROBBINS DAVID JAMES ())</p> <p>13 July 2000 (2000-07-13)</p> <p>* page 6 - page 13 *</p> <p>---</p>	1-11	
Y	<p>WO 99 50929 A (SIEVENPIPER DAN ;UNIV CALIFORNIA (US); YABLONOVITCH ELI (US))</p> <p>7 October 1999 (1999-10-07)</p> <p>* page 11 - page 21 *</p> <p>---</p>	1-12,16,17	<p>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</p> <p>H01Q</p>
A	<p>SIEVENPIPER D ET AL: "HIGH-IMPEDANCE ELECTROMAGNETIC SURFACES WITH A FORBIDDEN FREQUENCY BAND"</p> <p>IEEE TRANSACTIONS ON MICROWAVE THEORY AND TECHNIQUES, IEEE INC. NEW YORK, US, vol. 47, no. 11, November 1999 (1999-11), pages 2059-2074, XP000865103</p> <p>ISSN: 0018-9480</p> <p>* abstract *</p> <p>---</p> <p>-/--</p>	12,16,17	
<p>The present search report has been drawn up for all claims</p>			
Place of search		Date of completion of the search	Examiner
MUNICH		26 March 2002	Johansson, R
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone</p> <p>Y : particularly relevant if combined with another document of the same category</p> <p>A : technological background</p> <p>O : non-written disclosure</p> <p>P : intermediate document</p> <p>T : theory or principle underlying the invention</p> <p>E : earlier patent document, but published on, or after the filing date</p> <p>D : document cited in the application</p> <p>L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/92 (P04C01)



European Patent
Office

LACK OF UNITY OF INVENTION
SHEET B

Application Number

EP 01 30 8496

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims: 1-6,7-10,11

refer to an antenna system having a frequency dependent permeability in a direction normal to the frequency dependent surface.

2. Claim : 12

refer to an artificial magnetic conductor with Lorenz resonances in transverse permittivity.

3. Claims: 13-15

refer to an artificial magnetic conductor with permittivity and permeability tensors having non-zero elements in a main diagonal only.

4. Claims: 16-17

refer to an artificial magnetic conductor with a transverse permittivity given by a particular mathematical expression.



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 30 8496

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	<p>KYRIAZIDOU C A ET AL: "NOVEL MATERIAL WITH NARROW-BAND TRANSPARENCY WINDOW IN THE BULK"</p> <p>IEEE TRANSACTIONS ON ANTENNAS AND PROPAGATION, IEEE INC. NEW YORK, US, vol. 48, no. 1, January 2000 (2000-01), pages 107-116, XP000908642</p> <p>ISSN: 0018-926X</p> <p>* abstract *</p> <p>-----</p>	12,16,17	
			<p>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</p>
<p>The present search report has been drawn up for all claims</p>			
Place of search		Date of completion of the search	Examiner
MUNICH		26 March 2002	Johansson, R
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone</p> <p>Y : particularly relevant if combined with another document of the same category</p> <p>A : technological background</p> <p>O : non-written disclosure</p> <p>P : intermediate document</p> <p>T : theory or principle underlying the invention</p> <p>E : earlier patent document, but published on, or after the filing date</p> <p>D : document cited in the application</p> <p>L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 8496

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-03-2002

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
W0 0041270	A	13-07-2000	AU	1988500 A	24-07-2000
			CA	2322514 A1	13-07-2000
			W0	0041270 A1	13-07-2000
			GB	2346485 A ,B	09-08-2000

W0 9950929	A	07-10-1999	CA	2323610 A1	07-10-1999
			DE	1075712 T1	23-08-2001
			EP	1075712 A1	14-02-2001
			ES	2160561 T1	16-11-2001
			W0	9950929 A1	07-10-1999
			US	6262495 B1	17-07-2001

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82